

FEATURES :

- *Ultra-wide Bandwidth*
- *Low Insertion Loss*
- *Tight phase and amplitude balance*

SPECIFICATIONS

Frequency Range, [MHz]	0.3 - 30
Insertion Loss, typ/max [dB] (above 3dB Split Loss)	0.4 / 0.5
Isolation, typ/min [dB]	35 / 30
Amplitude Balance, typ/max [dB]	± 0.1 / ± 0.2
Phase Balance, typ/max [degrees]	± 2 / ± 3
VSWR	1.2 : 1


Operating Characteristics

Input Power, max. [mW] with matched loads	1000
Impedance, [Ohm]	50
Operating Temperature	-20°C to +70°C





Ordering Information

Model No.	Package
HYB03-30-6-SMA	A2
HYB03-30-6-N	A3
HYB03-30-6-BNC	A3

Outline drawing(A2) dimensions in inches

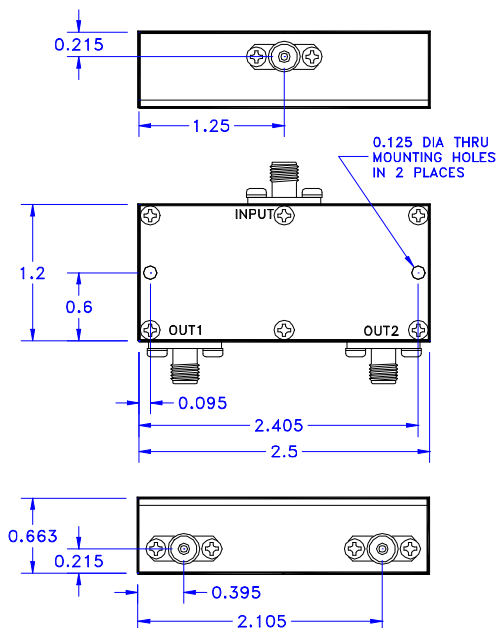

Typical Performance

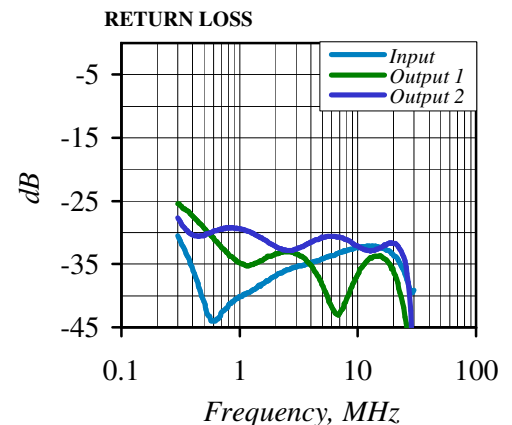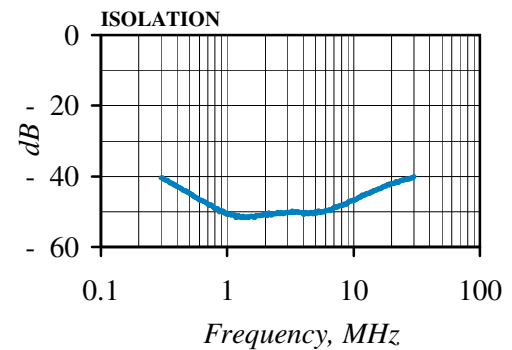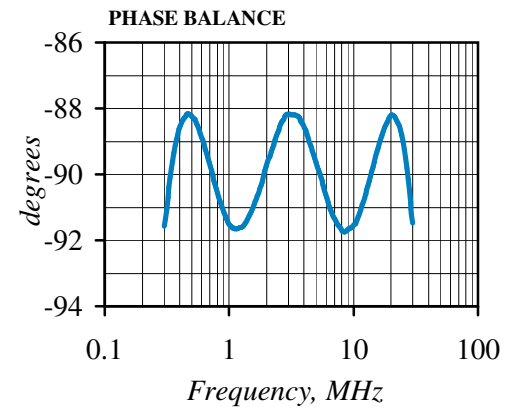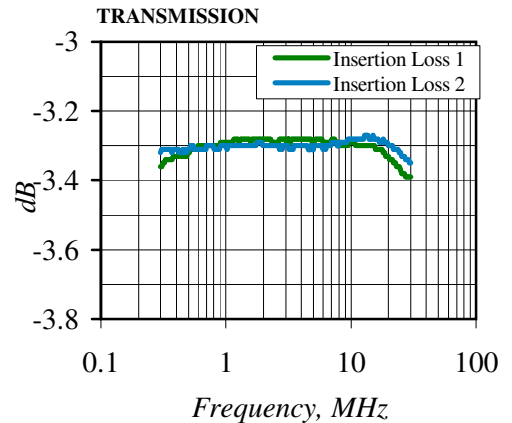

Specifications Subject To Change Without Notice