

FEATURES :

- High Power
- Low Loss
- High selectivity

TX SPECIFICATIONS

1 dB Passband, [GHz]	0.292 to 0.34
Insertion Loss@CF [dB]	0.7
Stopband rejection DC to 0.270GHz, [dB] min.	60
Stopband rejection 0.36 to 2GHz, [dB] min.	60
VSWR	1.5 : 1
Average Power, [Watts]	175

RX SPECIFICATIONS

1 dB Passband, [GHz]	0.243 to 0.27
Insertion Loss@CF [dB]	0.6
Stopband rejection DC to 0.210GHz, [dBc] min.	60
Stopband rejection 0.292 to 2GHz, [dBc] min.	60
VSWR	1.5 : 1
Input Power, [Watts]	175


Operating Characteristics

Operating Temperature	-40°C to +85°C
Impedance, [Ohm]	50

Ordering Information

Model No.	Connectors
DCL9-256-316E-SMA	SMA
DCL9-256-316E-N	N

Outline drawing, dimensions in mm

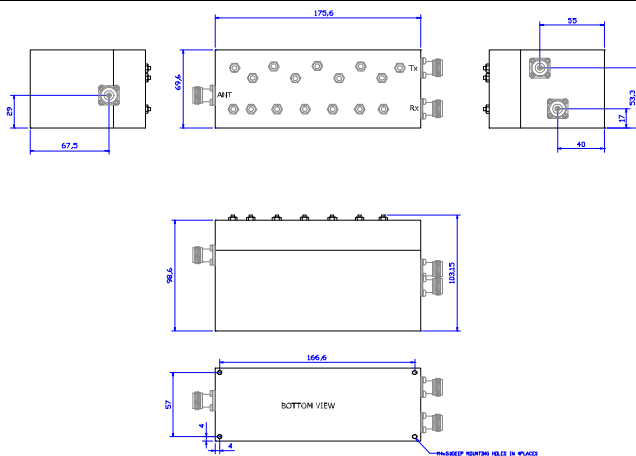

Specifications Subject To Change Without Notice

Rev. A 2.12.2022

Typical Performance

