

FEATURES :

- *Small Size*
- *Wide Passband*
- *Low Loss*


SPECIFICATIONS

Center Frequency, [GHz]	3
Passband, [GHz]	2.0 to 4.0
Insertion Loss 2 to 3.8GHz [dB] max.	1.5
Insertion Loss @4GHz [dB] max.	1.8
Reject Bands, [GHz]	DC to 1.6 and 4.75 to 13
Reject Attenuation, [dB] min.	50
VSWR	1.5 : 1
Average Power, [Watts]	5
Operating Characteristics	
Operating Temperature	-40°C to +85°C
Impedance, [Ohm]	50

Ordering Information

Model No.	Connectors
FBL17-3000-2000	SMA-female

Outline drawing

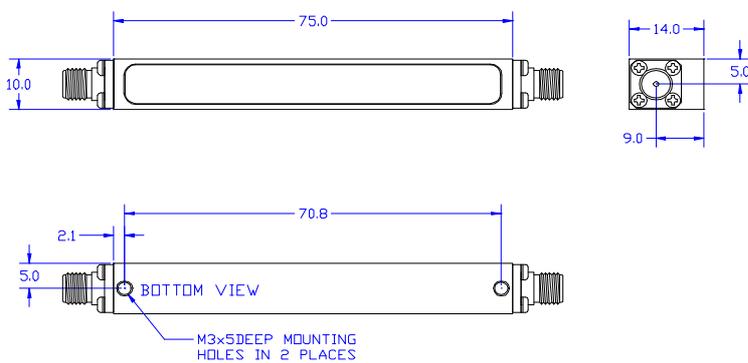

Dimensions in mm

Specifications Subject To Change Without Notice
 Rev. B 15.09.2022

