

FEATURES :

- **Small Size**
- **Wide Stopband**
- **Low loss**

SPECIFICATIONS @+25°C

Center Frequency, [MHz]	9800
1 dB Passband, [MHz], min	1000
Insertion Loss @CF, [dB] max.	1.2
Reject Bands, [GHz]	DC to 9.0 & 10.6 to 37
Reject Attenuation, [dBc] min.	50
VSWR	1.5 : 1
Average Power, [Watts]	5


Operating Characteristics

Operating Temperature	-20°C to +85°C
Impedance, [Ohm]	50

Ordering Information

Model No.	Connectors
FCL10-9800-1000	SMA-female

Outline drawing

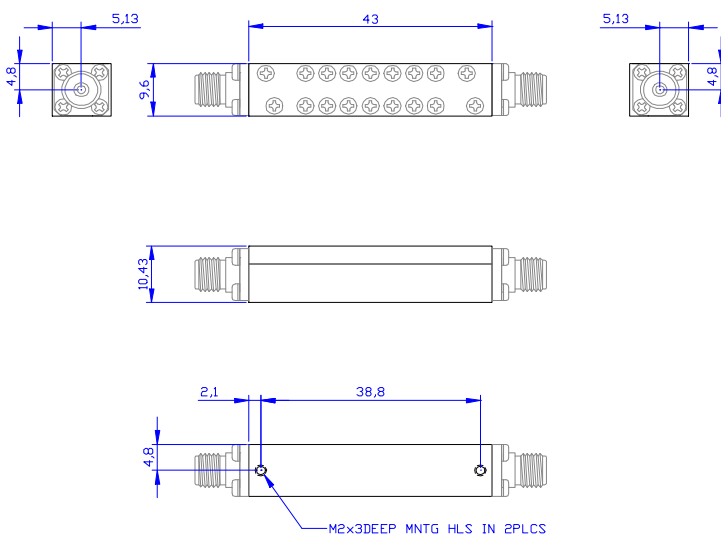

Dimensions in mm

Specifications Subject To Change Without Notice

Rev. B 06.07.2024

Typical Performance

