

**FEATURES :**

- Small Size
- Wide Stopband
- Low loss

**SPECIFICATIONS @+25°C**

Passband Frequency, [MHz]	12075 to 12650
Passband Loss, [dB] max.	2.7
1dB Passband, [MHz] min.	560
Reject Bands, [GHz]	DC to 11.94 & 12.8 to 35
Reject Attenuation, [dB] min.	40
VSWR, max.	1.5 : 1
Average Power, [Watts]	5


**Operating Characteristics**

Operating Temperature	-40°C to +85°C
Impedance, [Ohm]	50

**Ordering Information**

<b>Model No.</b>	<b>Connectors</b>
FCL11-12363-575	SMA-female

**Outline drawing**

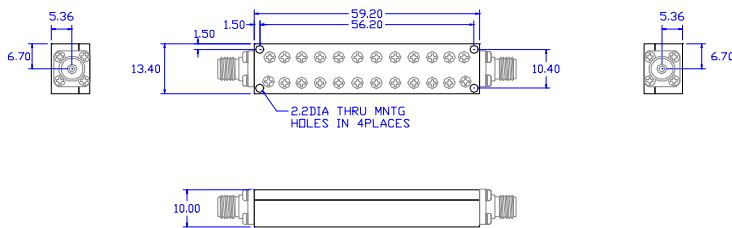

Dimensions in mm

Specifications Subject To Change Without Notice

Rev. B 14.10.2022

**Typical Performance**

