

**FEATURES :**

- Small Size
- Wide Stopband
- Low loss

**SPECIFICATIONS @+25°C**

Passband Frequency, [MHz]	15245 to 16195
Passband Loss, [dB] max.	3.5
1dB Passband, [MHz] min.	850
Reject Bands, [GHz]	DC to 15.14 & 16.4 to 39
Reject Attenuation, [dB] min.	40
VSWR, max.	1.5 : 1
Average Power, [Watts]	5


**Operating Characteristics**

Operating Temperature	-40°C to +85°C
Impedance, [Ohm]	50

**Ordering Information**

<b>Model No.</b>	<b>Connectors</b>
FCL14-15720-950	SMA-female

**Outline drawing**

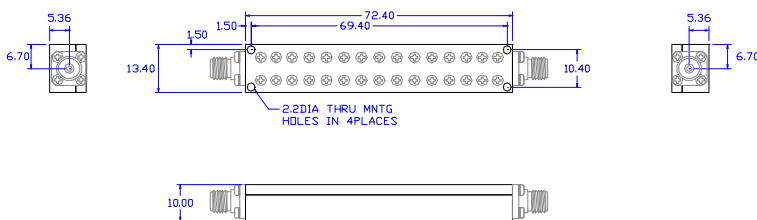

Dimensions in mm

Specifications Subject To Change Without Notice

Rev. B 14.10.2022

**Typical Performance**

