

FEATURES :

- **Small Size**
- **Wideband**
- **Low loss**


SPECIFICATIONS

Center Frequency, [GHz]	7
Insertion Loss @CF, [dB] max.	1
3dB bandwidth, [GHz]	2.0
Reject Bands, [GHz]	DC to 5.7 & 8.125 to 22
Reject Attenuation, [dB] min.	50
VSWR	1.5 : 1
Average Power, [Watts]	5
Operating Characteristics	
Operating Temperature	40°C to +85°C
Impedance, [Ohm]	50

Ordering Information

Model No.	Connectors
FCL16-7000-2000	SMA-female

Outline drawing

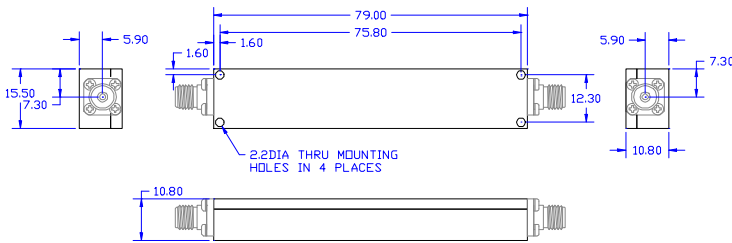

Dimensions in mm

Specifications Subject To Change Without Notice

Rev. B 15.09.2022

Typical Performance

