

**FEATURES :**

- **Small Size**
- **Narrowband**
- **Steep Rejection**

**SPECIFICATIONS @+25°C**

Center Frequency, [GHz]	10
Insertion Loss @CF, [dB] max.	2.0
1dB Passband, [MHz] min.	40.0
Reject Bands, [GHz]	DC to 9.85 & 10.15 to 22
Reject Attenuation, [dB] min.	40
VSWR, max.	1.5 : 1
Average Power, [Watts]	5


**Operating Characteristics**

Operating Temperature	-40°C to +85°C
Impedance, [Ohm]	50

**Ordering Information**

<b>Model No.</b>	<b>Connectors</b>
FCL3-10000-40	SMA-female

**Outline drawing**

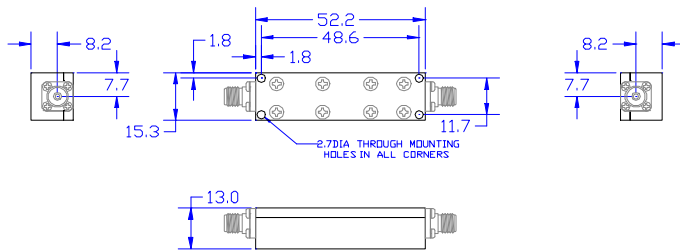

Dimensions in mm

Specifications Subject To Change Without Notice

Rev. C 27.03.2023

**Typical Performance**

