

FEATURES :

- **Small Size**
- **High Power**
- **Low loss**


SPECIFICATIONS @+25°C

Center Frequency, [MHz]	3000
Insertion Loss @CF, [dB] max.	1.6
1dB Passband, [MHz] min.	18.0
Reject Bands, [GHz]	DC to 2.85 & 3.13 to 10
Reject Attenuation, [dB] min.	60
VSWR, max.	1.5 : 1
Average Power, [Watts]	10
Operating Characteristics	
Operating Temperature	-40°C to +85°C
Impedance, [Ohm]	50

Ordering Information

Model No.	Connectors
FCL3-3000-18	SMA-female

Outline drawing

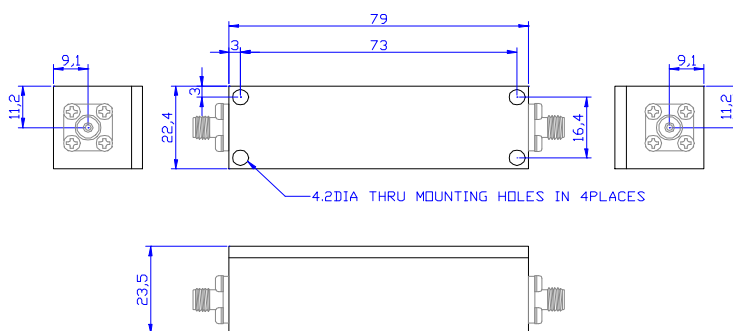

Dimensions in mm

Specifications Subject To Change Without Notice

Rev. A 26.10.2022

Typical Performance

