

## FEATURES :

- **Small Size**
- **High Power**
- **Low loss**

## SPECIFICATIONS @+25°C

Center Frequency, [MHz]	3500
Insertion Loss @CF, [dB] max.	1.5
1dB Passband, [MHz] min.	22.0
Reject Bands, [GHz]	DC to 3.35 & 3.65 to 10
Reject Attenuation, [dB] min.	60
VSWR, max.	1.5 : 1
Average Power, [Watts]	10


## Operating Characteristics

Operating Temperature	-40°C to +85°C
Impedance, [Ohm]	50

## Ordering Information

Model No.	Connectors
FCL3-3500-22	SMA-female

## Outline drawing

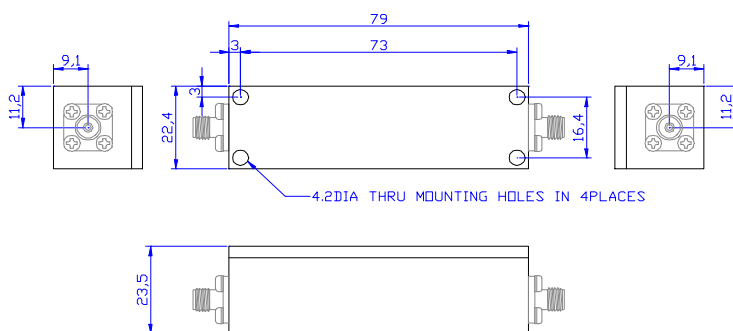

Dimensions in mm

Specifications Subject To Change Without Notice

Rev. A 2.12.2022

## Typical Performance

