

**FEATURES :**

- **Small Size**
- **High Power**
- **Low loss**

**SPECIFICATIONS @+25°C**

Center Frequency, [MHz]	4250
Insertion Loss @CF, [dB] max.	1.2
1dB Passband, [MHz] min.	30.0
Reject Bands, [GHz]	DC to 4.06 & 4.44 to 10
Reject Attenuation, [dB] min.	60
VSWR, max.	1.5 : 1
Average Power, [Watts]	10


**Operating Characteristics**

Operating Temperature	-40°C to +85°C
Impedance, [Ohm]	50

**Ordering Information**

<b>Model No.</b>	<b>Connectors</b>
FCL3-4250-30	SMA-female

**Outline drawing**

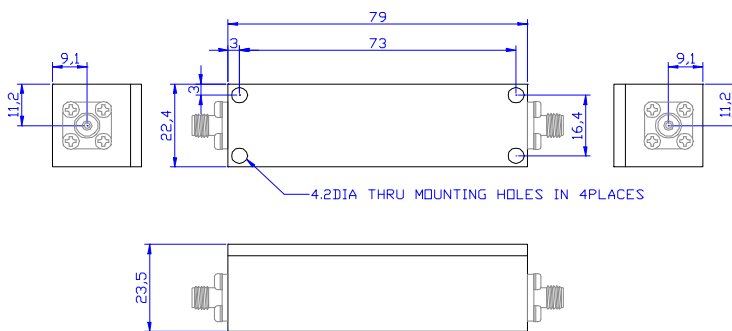

Dimensions in mm

Specifications Subject To Change Without Notice

Rev. A 2.12.2022

**Typical Performance**

