

FEATURES :

- **Small Size**
- **High Power**
- **Low loss**

SPECIFICATIONS @+25°C

| | |
|-------------------------------|-------------------------|
| Center Frequency, [MHz] | 4500 |
| Insertion Loss @CF, [dB] max. | 1.2 |
| 1dB Passband, [MHz] min. | 32.0 |
| Reject Bands, [GHz] | DC to 4.28 & 4.71 to 10 |
| Reject Attenuation, [dB] min. | 60 |
| VSWR, max. | 1.5 : 1 |
| Average Power, [Watts] | 10 |


Operating Characteristics

| | |
|-----------------------|----------------|
| Operating Temperature | -40°C to +85°C |
| Impedance, [Ohm] | 50 |

Ordering Information

| | |
|------------------|-------------------|
| Model No. | Connectors |
| FCL3-4500-32 | SMA-female |

Outline drawing

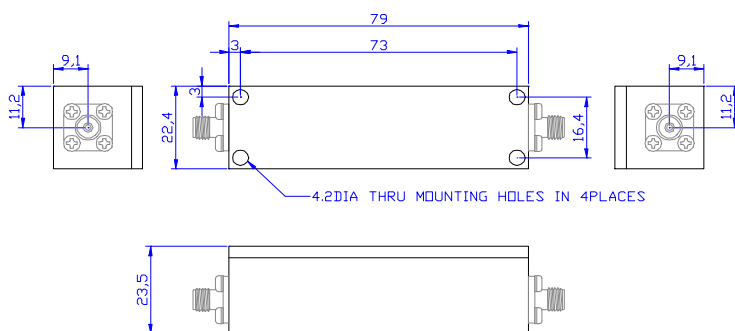

Dimensions in mm

Specifications Subject To Change Without Notice

Rev. A 2.12.2022

Typical Performance

