

## FEATURES :

- **Small Size**
- **High Power**
- **Low loss**

## SPECIFICATIONS @+25°C

Center Frequency, [MHz]	5000
Insertion Loss @CF, [dB] max.	1.1
1dB Passband, [MHz] min.	38.0
Reject Bands, [GHz]	DC to 4.75 & 5.25 to 10
Reject Attenuation, [dB] min.	60
VSWR, max.	1.5 : 1
Average Power, [Watts]	10


## Operating Characteristics

Operating Temperature	-40°C to +85°C
Impedance, [Ohm]	50

## Ordering Information

<b>Model No.</b>	<b>Connectors</b>
FCL3-5000-38	SMA-female

## Outline drawing

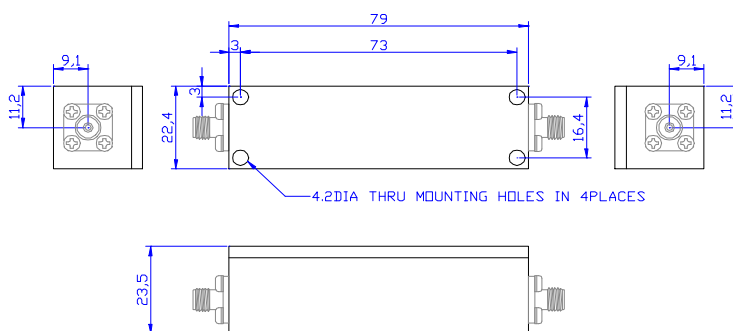

Dimensions in mm

Specifications Subject To Change Without Notice

Rev. A 2.12.2022

## Typical Performance

