

**FEATURES :**

- **Small Size**
- **High Power**
- **Low loss**
- **Wide Stopband**

**SPECIFICATIONS @+25°C**

Passband Frequency, [GHz]	5.15 to 5.925
Passband Loss, [dB] max.	0.5
1dB Passband, [MHz] min.	980
Reject Bands, [GHz]	DC to 1.8 & 7.5 to 26
Reject Attenuation, [dB] min.	40
VSWR, max.	1.5 : 1
Average Power, [Watts]	5


**Operating Characteristics**

Operating Temperature	-20°C to +70°C
Impedance, [Ohm]	50

**Ordering Information**

<b>Model No.</b>	<b>Connectors</b>
FCL3-5537-800	SMA-female

**Outline drawing**

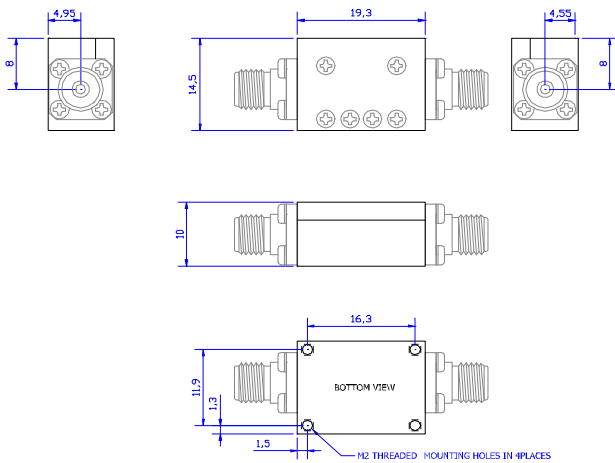

Dimensions in mm

Specifications Subject To Change Without Notice

Rev. B 14.10.2022

**Typical Performance**

