

**FEATURES :**

- **Small Size**
- **Wide Stopband**
- **Low loss**

**SPECIFICATIONS @+25°C**

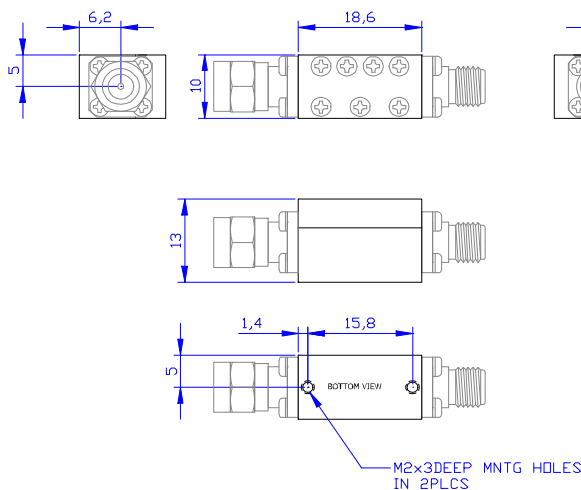
Center Frequency, [MHz]	5775
3 dB Passband, [MHz], min	500
Insertion Loss @CF, [dB] max.	0.6
Reject Bands, [GHz]	DC to 3.2 & 7.5 to 26
Reject Attenuation, [dBc] min.	50
VSWR	1.5 : 1
Average Power, [Watts]	5

**Operating Characteristics**

Operating Temperature	-20°C to +85°C
Impedance, [Ohm]	50

**Ordering Information**

<b>Model No.</b>	<b>Connectors</b>
FCL3-5775-500	SMA-male/female

**Outline drawing**


Dimensions in mm

Specifications Subject To Change Without Notice

Rev. B 11.06.2024

**Typical Performance**
