

FEATURES :

- **Small Size**
- **High Power**
- **Low loss**

SPECIFICATIONS @+25°C

Center Frequency, [MHz]	1000
Insertion Loss @CF, [dB] max.	1.3
1dB Passband, [MHz] min.	20.0
	DC to 0.95 &
Reject Bands, [GHz]	1.05 to 10
Reject Attenuation, [dB] min.	50
VSWR, max.	1.5 : 1
Average Power, [Watts]	25


Operating Characteristics

Operating Temperature	-40°C to +85°C
Impedance, [Ohm]	50

Ordering Information

Model No.	Connectors
FCL4-1000-20B	SMA-female

Outline drawing

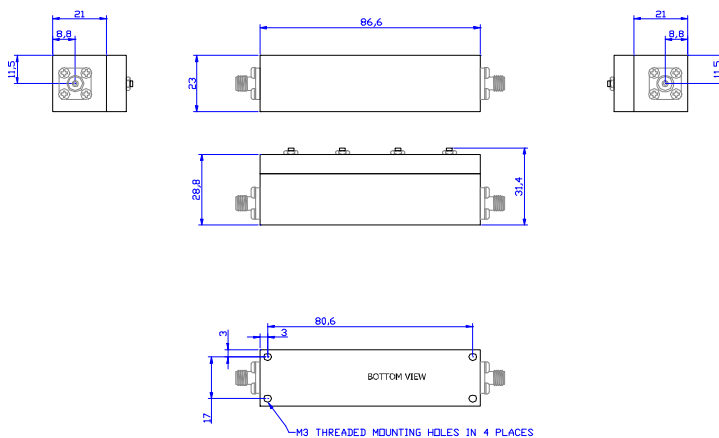

Dimensions in mm

Specifications Subject To Change Without Notice

Rev. B 27.03.2023

Typical Performance

