

Typical Performance

FEATURES :

- **Small Size**
- **Narrowband**
- **Low loss**


SPECIFICATIONS @+25°C

Center Frequency, [MHz]	3040
Insertion Loss @CF, [dB] max.	2.2
1dB Passband, [MHz] min.	20.0
Reject Bands, [GHz]	DC to 3.015 & 3.065 to 13
Reject Attenuation, [dB] min.	20
VSWR, max.	1.3 : 1
Average Power, [Watts]	5
Operating Characteristics	
Operating Temperature	-40°C to +85°C
Impedance, [Ohm]	50

Ordering Information

Model No.	Connectors
FCL4-3040-20U	SMA-female

Outline drawing

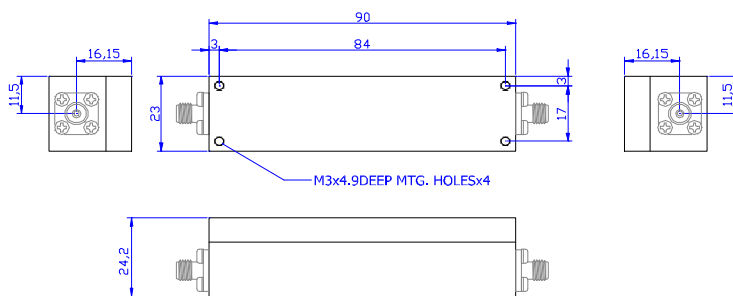

Dimensions in mm

Specifications Subject To Change Without Notice

Rev. B 2.12.2022

