

**FEATURES :**

- **Small Size**
- **High Power**
- **Low loss**

**SPECIFICATIONS @+25°C**

Center Frequency, [MHz]	1460
Insertion Loss @CF, [dB] max.	0.5
1dB Passband, [MHz] min.	133.0
Reject Bands, [GHz]	DC to 1.29 & 1.575 to 4.5
Reject Attenuation, [dB] min.	50
VSWR, max.	1.5 : 1
Average Power, [Watts]	10


**Operating Characteristics**

Operating Temperature	-40°C to +85°C
Impedance, [Ohm]	50

**Ordering Information**

<b>Model No.</b>	<b>Connectors</b>
FCL8-1460-133	SMA-female

**Outline drawing**

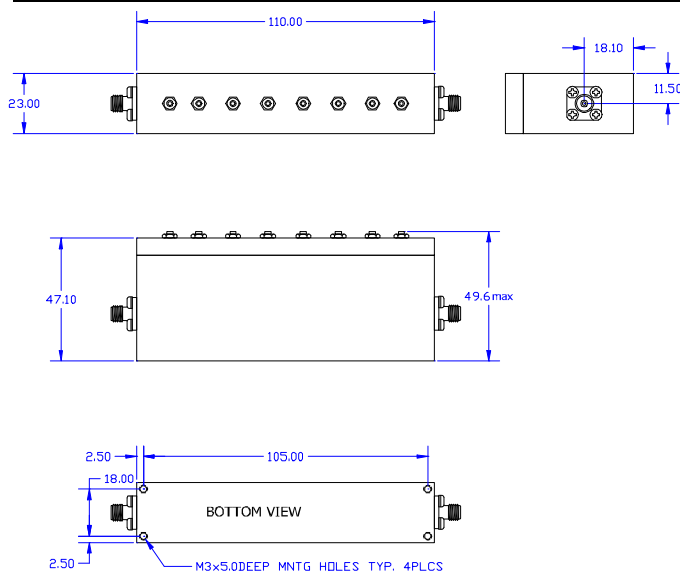

Dimensions in mm

Specifications Subject To Change Without Notice

Rev. B 14.10.2022

**Typical Performance**

