

FEATURES :

- **Small Size**
- **Wideband**
- **Low loss**


SPECIFICATIONS

Center Frequency, [GHz]	19
Insertion Loss in passband, [dB] max.	1.2
Passband, [GHz]	18 to 20
	DC to 17 &
Reject Bands, [GHz]	21.5 to 40
Reject Attenuation, [dB] min.	50
VSWR	1.5 : 1
Average Power, [Watts]	5
Operating Characteristics	
Operating Temperature	40°C to +85°C
Impedance, [Ohm]	50

Ordering Information

Model No.	Connectors
FCL9-19000-2000	SMA-female

Outline drawing

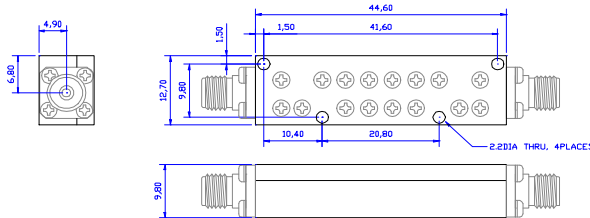

Dimensions in mm

Specifications Subject To Change Without Notice

Rev. B 14.10.2022

Typical Performance

