

**FEATURES :**

- **Small Size**
- **Wideband**
- **Low loss**


**SPECIFICATIONS**

Center Frequency, [GHz]	7
Insertion Loss in passband, [dB] max.	1.5
Passband, [GHz]	4.8 to 9.2
Reject Bands, [GHz]	DC to 3.8 & 10.5 to 16
Reject Attenuation, [dB] min.	50
VSWR	2.0 : 1
Average Power, [Watts]	5
<b>Operating Characteristics</b>	
Operating Temperature	40°C to +85°C
Impedance, [Ohm]	50

**Ordering Information**

<b>Model No.</b>	<b>Connectors</b>
FID11-7000-4400	SMA-female

**Outline drawing**

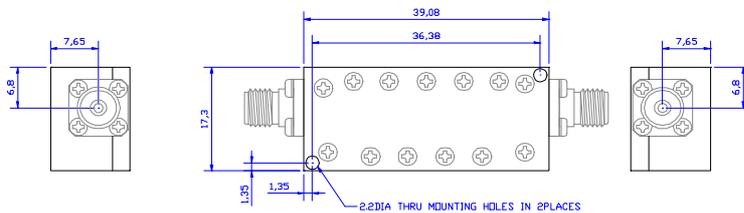

Dimensions in mm

Specifications Subject To Change Without Notice

**Typical Performance**

