

FEATURES :

- **Small Size**
- **Wideband**
- **Low loss**


SPECIFICATIONS

Center Frequency, [GHz]	9.4
Insertion Loss in passband, [dB] max.	1.5
Passband, [GHz]	6.4 to 12.4
Reject Bands, [GHz]	DC to 5.1 & 13.9 to 21
Reject Attenuation, [dB] min.	50
VSWR	2.0 : 1
Average Power, [Watts]	5
Operating Characteristics	
Operating Temperature	-40°C to +85°C
Impedance, [Ohm]	50

Ordering Information

Model No.	Connectors
FID11-9400-6000	SMA-female

Outline drawing

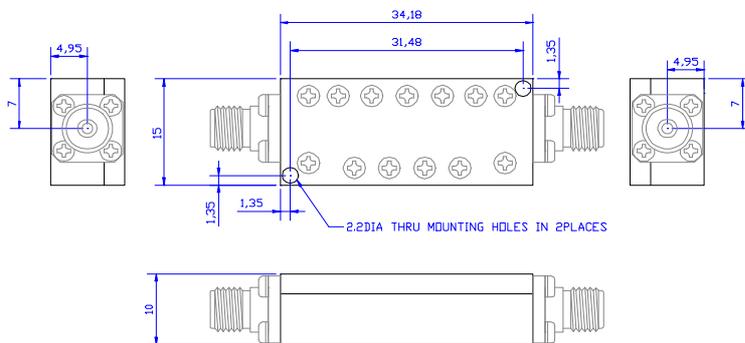

Dimensions in mm

Specifications Subject To Change Without Notice

Typical Performance

