

FEATURES :

- **High Power: 150W CW**
- **Steep Rejection**
- **Wide Stopband**

SPECIFICATIONS


Passband Frequencies, [MHz]	DC to 30
Passband Loss, [dB] max.	0.5
Rejection 37MHz to 500MHz, [dB] min.	40
VSWR	1.5 : 1

Operating Characteristics




Input Power CW, [W] with matched load	150
Peak Input Power, [W] with matched load	250
Stopband Power, [W] max.	1
Impedance, [Ohm]	50

Connectors	N female
Operating Temperature	-20°C to +60°C
Ordering Information	
Model No.	FLL13-30-150W

Outline drawing dimensions in mm

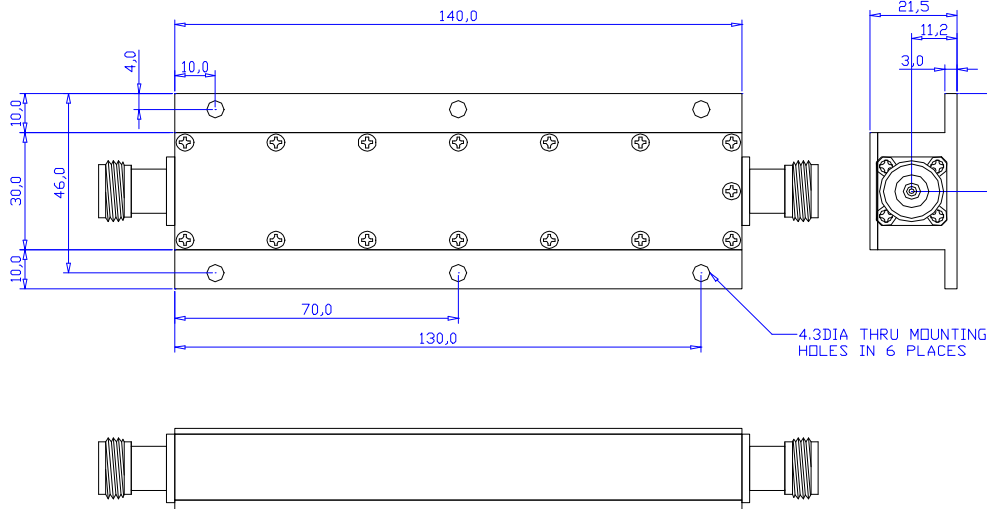

Typical Performance

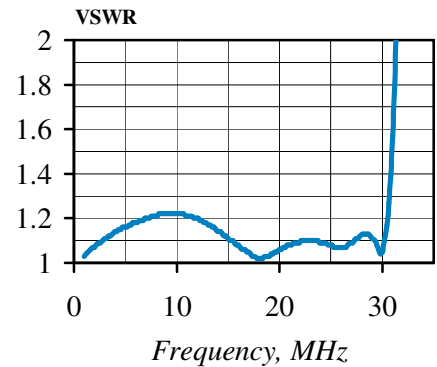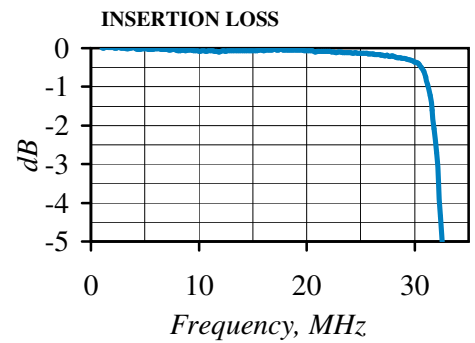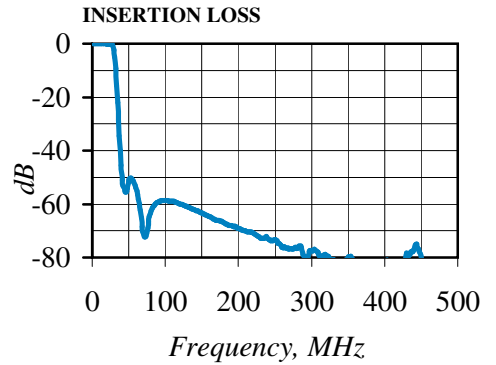

Specifications Subject To Change Without Notice
Rev. B 01.10.2023