

FEATURES :

- **Stopband Frequency 42 to 65MHz**
- **40dB Rejection**
- **Passband up to 610MHz**

SPECIFICATIONS

Stopband Frequency, [MHz]	42-65
Stopband Attenuation, [dB] min.	40
Lower Passband Frequency, [MHz]	DC to 30
Higher Passband Frequency, [MHz]	88 to 610
Passband Loss, [dB] max.	0.5
VSWR	1.5:1


Operating Characteristics

Input Power, CW [W] with matched load	1
Impedance, [Ohm]	50
Operating Temperature, [°C]	-20 to +70





Ordering Information

Model No.	Connectors
FSL-30-88-SMA	SMA

Outline drawing dimensions in mm

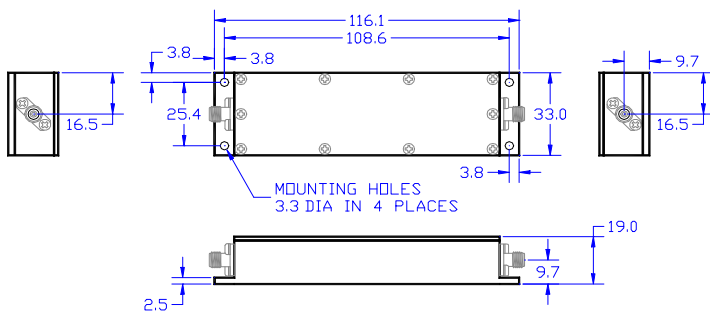

Typical Performance

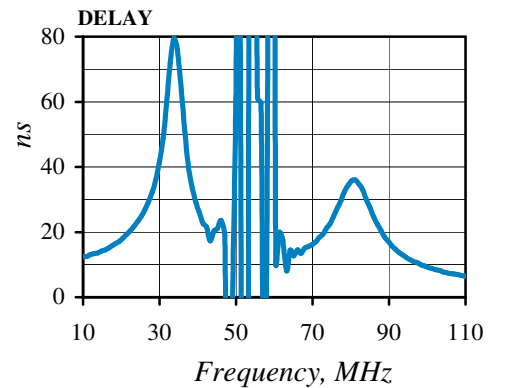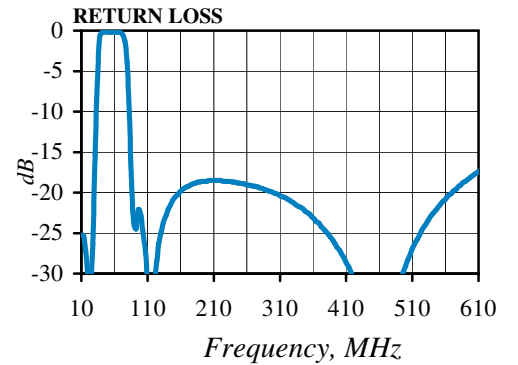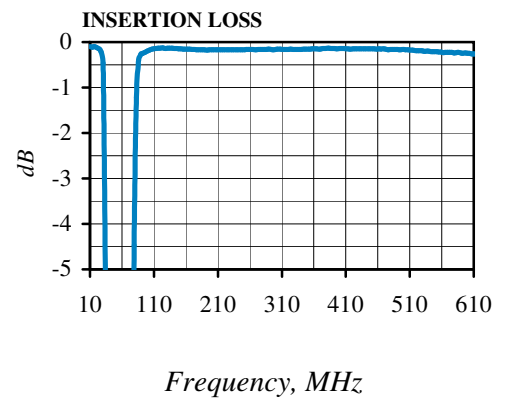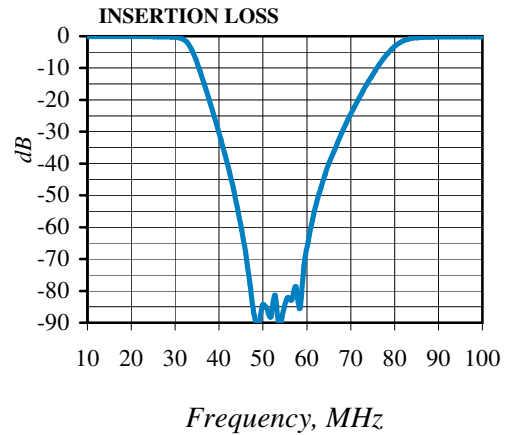

Specifications Subject To Change Without Notice
Rev. A 12.01.2023

