

**FEATURES :**

- **Compact Size**
- **Low Loss**
- **High Power**

**SPECIFICATIONS @+25°C**

**Band 1**

Passband, [MHz]	2100 to 2200
Passband Loss, [dB] max	0.6
VSWR, max	1.3 : 1
Stopband rejection DC to 1.35GHz, [dB] min	60
Stopband rejection 2.8 to 8GHz, [dB] min.	60

**Band 2**

Passband, [MHz]	4200 to 4400
Passband Loss, [dB] max	0.4
VSWR, max	1.2 : 1
Stopband rejection DC to 2.8GHz, [dB] min.	60
Stopband rejection 6.1 to 8GHz, [dB] min.	60

**Band 3**

Passband, [MHz]	6300 to 6600
Passband Loss, [dB] max	0.7
VSWR, max	1.5 : 1
Stopband rejection DC to 5.4GHz, [dB] min.	60
Stopband rejection 7.6 to 8GHz, [dB] min.	60






**Operating Characteristics**

Operating Temperature	-25°C to +60°C
Storage Temperature	55°C to +105°C
Impedance, [Ohm]	50
Input Power, [Watts]	100


**Mechanical**

Connectors	N-male
Dimensions, [mm]	88x76x27.8

**Typical Performance**

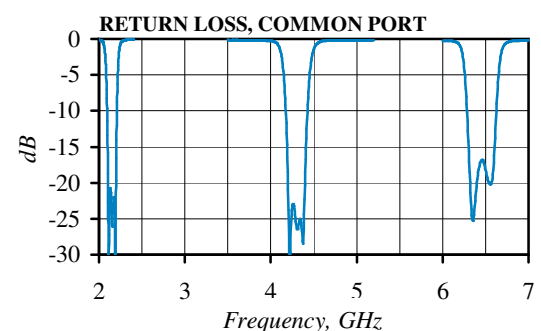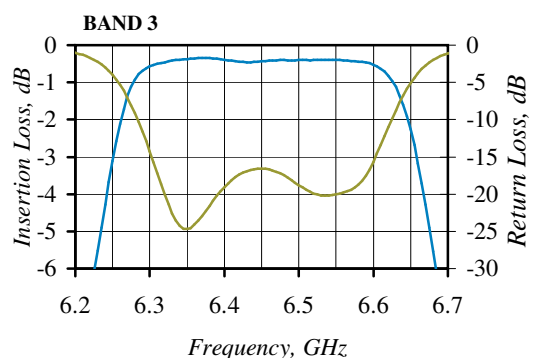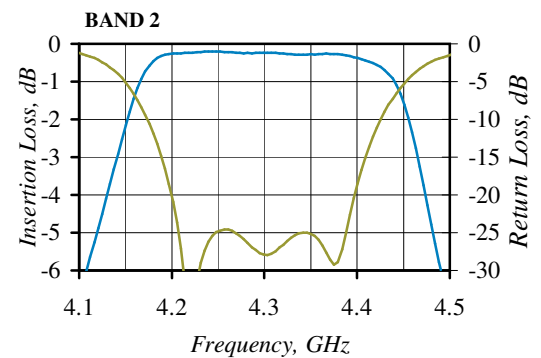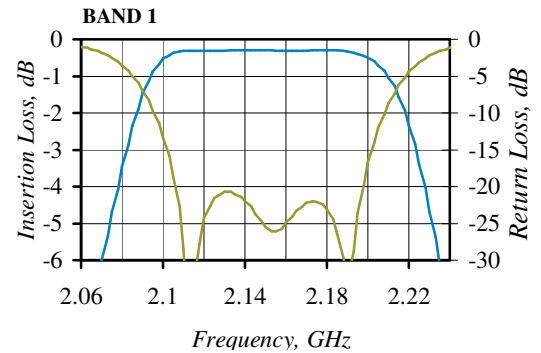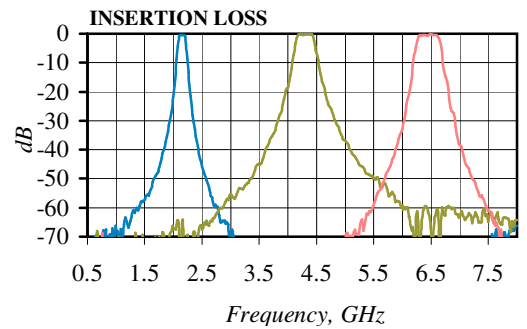

**OUTLINE DRAWING**

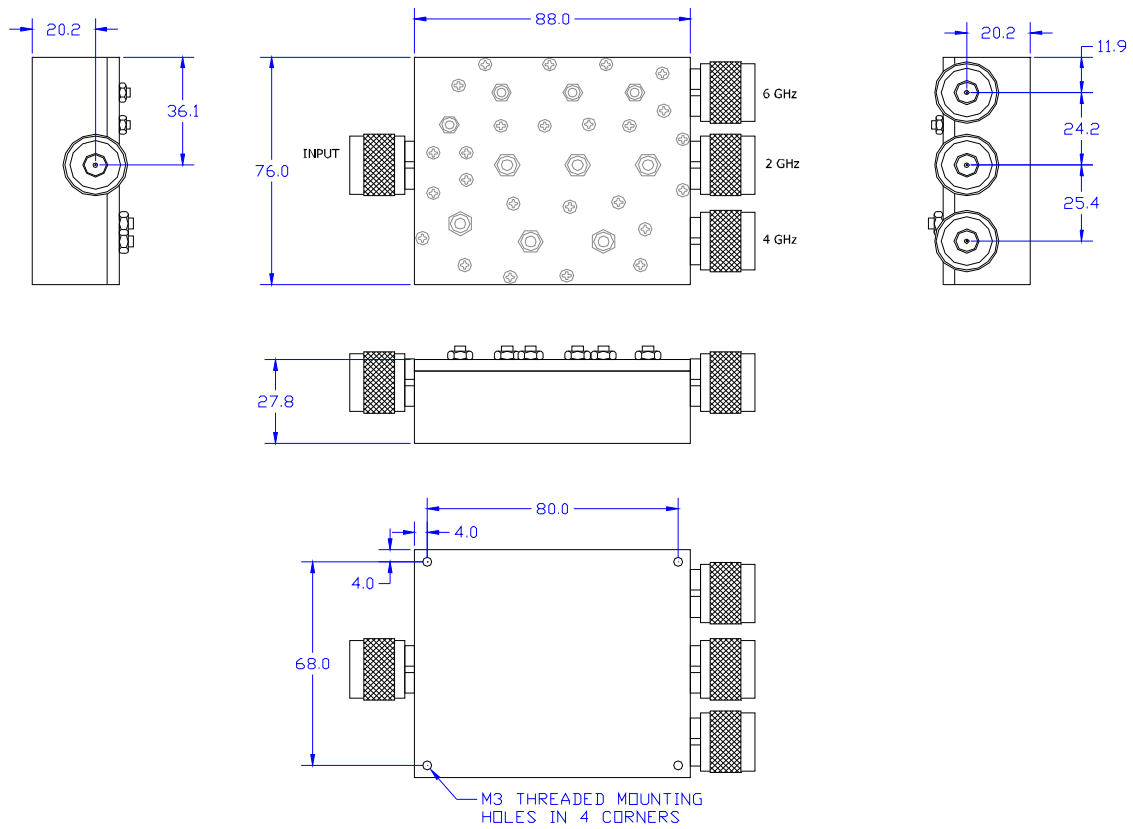

Specifications Subject To Change Without Notice  
Rev. A 08.12.2022

