

**FEATURES :**

- **High Power**
- **Low Loss**

**SPECIFICATIONS**

Center Frequency, [MHz]	5
Insertion Loss@CF [dB] max.	0.8
1dB Bandwidth, [MHz] min.	4
20dB Bandwidth, [MHz] max.	4.8
Reject Bands, [MHz]	DC to 2.0 and 8.0 to 100
Reject Attenuation, [dB] min.	60
VSWR	1.5 : 1
Average Power, [Watts]	100


**Operating Characteristics**

Operating Temperature	-40°C to +85°C
Impedance, [Ohm]	50

**Ordering Information**

Model No.	Connectors
FBL11-5-4-100W	N

**Outline drawing**

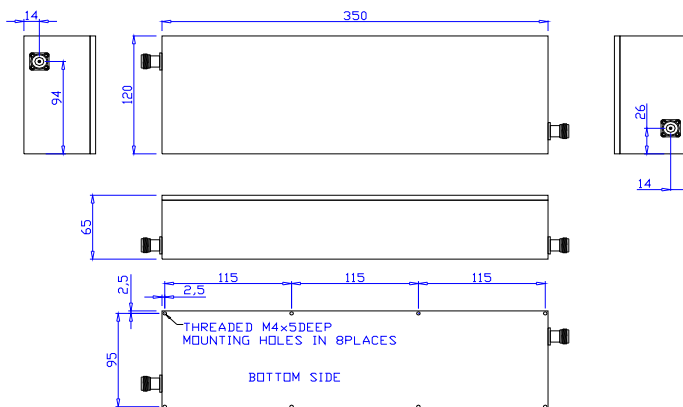

Dimensions in mm

