

FEATURES :

- *Small Size*
- *Wide Passband*
- *Steep Rejection*



SPECIFICATIONS

| | |
|----------------------------------|--------------------------|
| Center Frequency, [GHz] | 1.2 |
| Insertion Loss@Center Freq. [dB] | 1.2 |
| 3dB Bandwidth, [GHz] min. | 0.8 |
| 20dB Bandwidth, [GHz] max. | 0.9 |
| Reject Bands, [GHz] | DC to 0.6 and 1.8 to 3.7 |
| Reject Attenuation, [dB] min. | 60 |
| VSWR | 1.5 : 1 |
| Average Power, [Watts] | 1 |
| Operating Characteristics | |
| Operating Temperature | -40°C to+85°C |
| Impedance, [Ohm] | 50 |

Ordering Information

| Model No. | Connectors |
|----------------|------------|
| FBL13-1200-800 | SMA |

Outline drawing

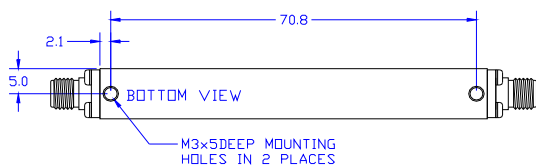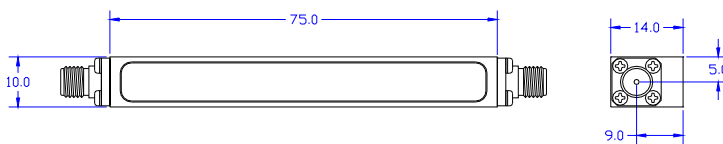

Dimensions in mm

