

**FEATURES :**

- *Small Size*
- *Wide Passband*
- *Low Loss*


**SPECIFICATIONS**

Center Frequency, [GHz]	3
Insertion Loss@Center Freq. [dB]	0.8
1dB Bandwidth, [GHz] min.	4.0
20dB Bandwidth, [GHz] max.	5
Reject Bands, [GHz]	DC to 0.5 and 6.6 to 13
Reject Attenuation, [dB] min.	60
VSWR	1.5 : 1
Average Power, [Watts]	1
<b>Operating Characteristics</b>	
Operating Temperature	-40°C to +85°C
Impedance, [Ohm]	50

**Ordering Information**

Model No.	Connectors
FBL13-3000-4000	SMA

**Outline drawing**

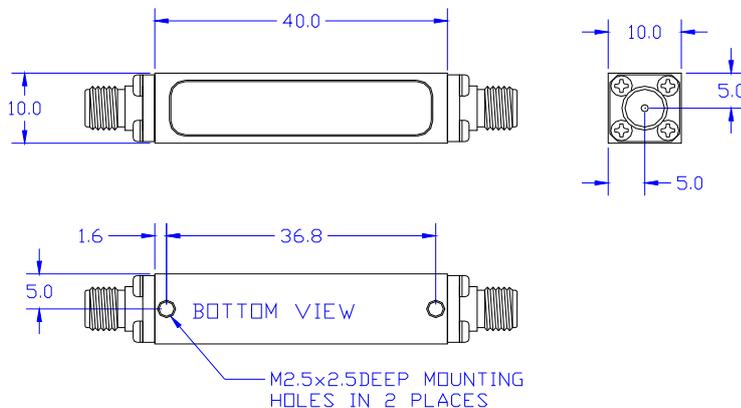

Dimensions in mm

