

FEATURES :

- **High Power**
- **Low Loss**
- **Wide Stopband**


SPECIFICATIONS

Center Frequency, [MHz]	73
Insertion Loss@CF [dB] max.	1.0
1dB Bandwidth, [MHz] min.	175
20dB Bandwidth, [MHz] max.	210
Reject Bands, [MHz]	DC to 180 and 430 to 2000
Reject Attenuation, [dB] min.	60
VSWR	1.5 : 1
Average Power, [Watts]	30
Operating Characteristics	
Operating Temperature	-40°C to +85°C
Impedance, [Ohm]	50

Ordering Information

Model No.	Connectors
FBL13-315-175	N

Outline drawing

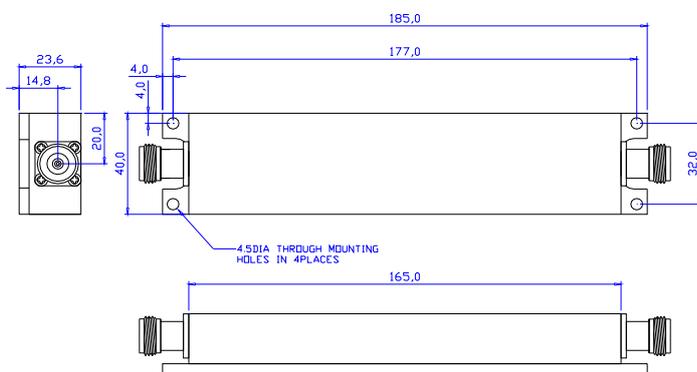

Dimensions in mm

