

**FEATURES :**

- *Small Size*
- *Low Loss*
- *Wide Stopband*






**SPECIFICATIONS**

|                                  |                          |
|----------------------------------|--------------------------|
| Center Frequency, [MHz]          | 225                      |
| Insertion Loss@CF [dB] max.      | 0.7                      |
| 1dB Bandwidth, [MHz] min.        | 250                      |
| 20dB Bandwidth, [MHz] max.       | 290                      |
| Reject Bands, [MHz]              | DC to 70 and 400 to 1700 |
| Reject Attenuation, [dB] min.    | 60                       |
| VSWR                             | 1.5 : 1                  |
| Average Power, [Watts]           | 5                        |
| <b>Operating Characteristics</b> |                          |
| Operating Temperature            | -40°C to +85°C           |
| Impedance, [Ohm]                 | 50                       |

**Ordering Information**

| Model No.         | Connectors |
|-------------------|------------|
| FBL21-225-250-SMA | SMA        |
| FBL21-225-250-N   | N          |

**Outline drawing**

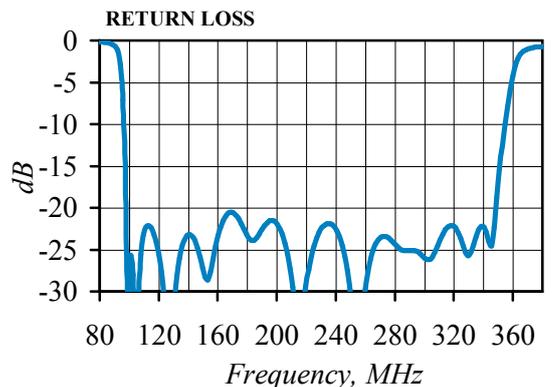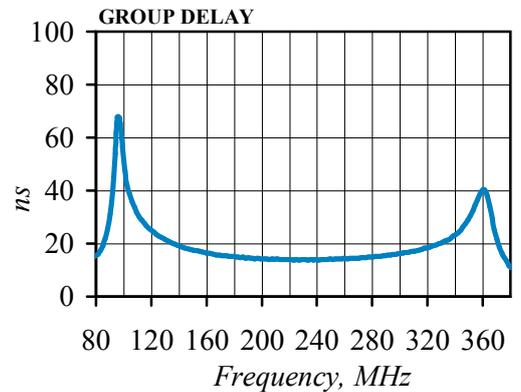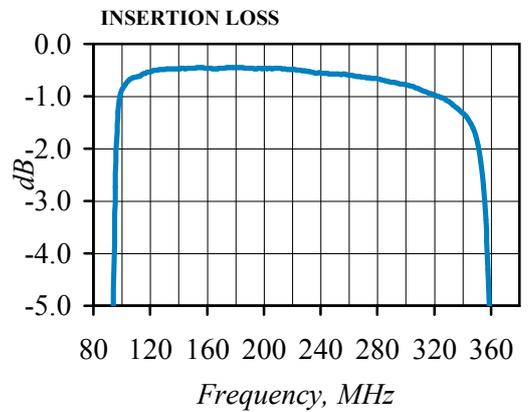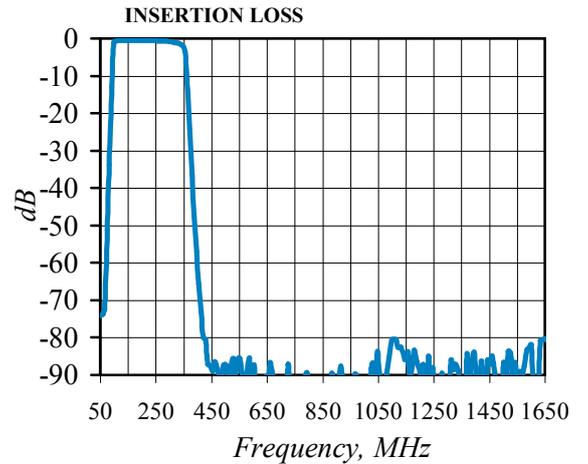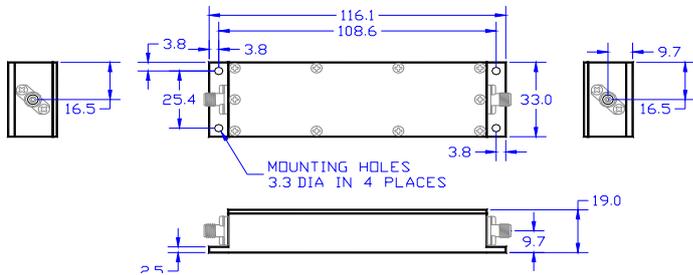

Specifications Subject To Change Without Notice