

FEATURES :

- **High Power**
- **Low Loss**


SPECIFICATIONS

Center Frequency, [MHz]	6.9
Insertion Loss@CF [dB] max.	1.4
1dB Bandwidth, [MHz] min.	0.60
20dB Bandwidth, [MHz] max.	1.30
Reject Bands, [MHz]	DC to 5.0 and 9.2 to 240
Reject Attenuation, [dB] min.	60
VSWR	1.5 : 1
Average Power, [Watts]	100
Operating Characteristics	
Operating Temperature	-40°C to +85°C
Impedance, [Ohm]	50

Ordering Information

Model No.	Connectors
FBL4-6.9-0.4	N

Outline drawing

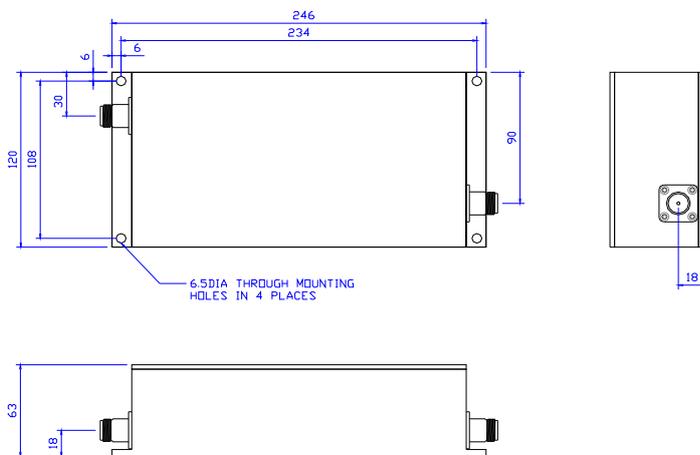

Dimensions in mm

Specifications Subject To Change Without Notice

