

**FEATURES :**

- **High Power**
- **Narrow Bandwidth**
- **Wide Stopband**


**SPECIFICATIONS**

Center Frequency, [MHz]	245
Insertion Loss@CF [dB] max.	2.5
1dB Bandwidth, [MHz] min.	12
20dB Bandwidth, [MHz] max.	24
Reject Bands, [MHz]	DC to 215 and 270 to 1500
Reject Attenuation, [dB] min.	60
VSWR	1.5 : 1
Average Power, [Watts]	30
<b>Operating Characteristics</b>	
Operating Temperature	-40°C to +85°C
Impedance, [Ohm]	50





**Ordering Information**

Model No.	Connectors
FBL5-245-10	N

**Outline drawing**

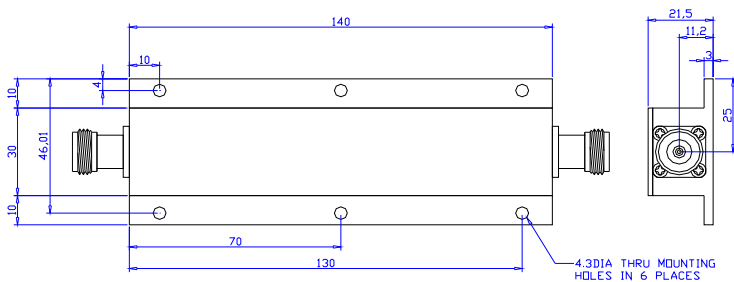

Dimensions in mm

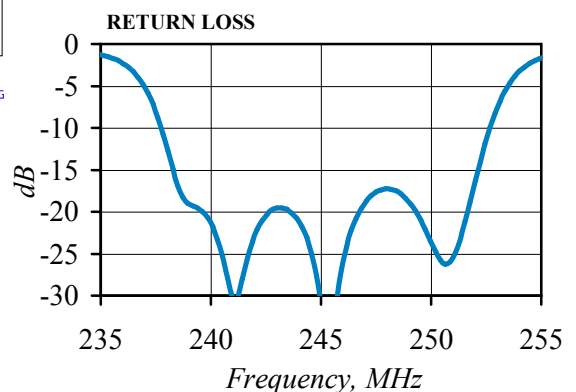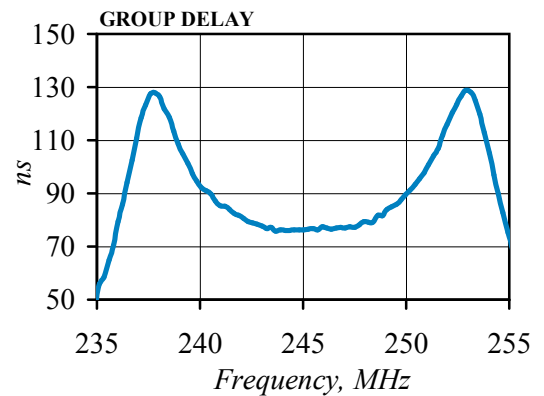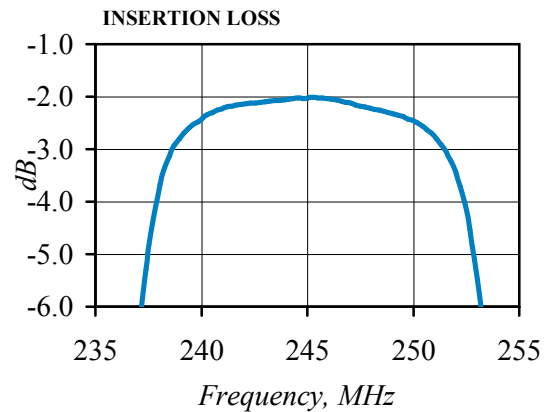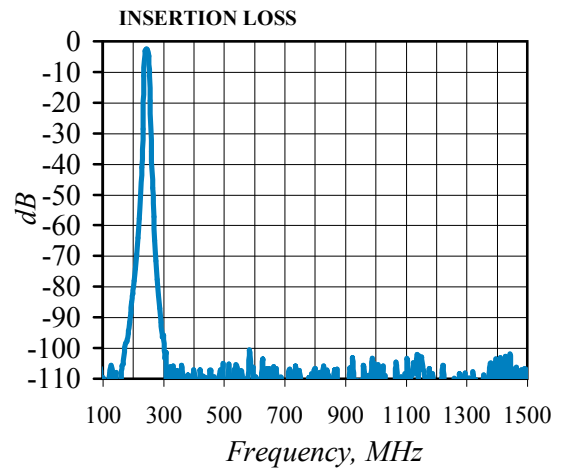

Specifications Subject To Change Without Notice