

FEATURES :

- *High Power*
- *Low Loss*


SPECIFICATIONS

Center Frequency, [MHz]	3.7
Insertion Loss@CF [dB] max.	1.0
1dB Bandwidth, [MHz] min.	0.8
20dB Bandwidth, [MHz] max.	1.3
	DC to 2.3 and
Reject Bands, [MHz]	5.3 to 120
Reject Attenuation, [dB] min.	60
VSWR	1.5 : 1
Average Power, [Watts]	100
Operating Characteristics	
Operating Temperature	-40°C to +85°C
Impedance, [Ohm]	50





Ordering Information

Model No.	Connectors
FBL5-3.7-0.6	N

Outline drawing

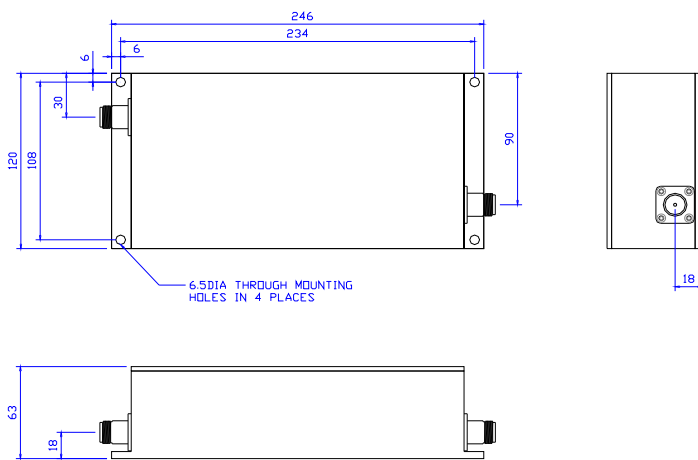

Dimensions in mm

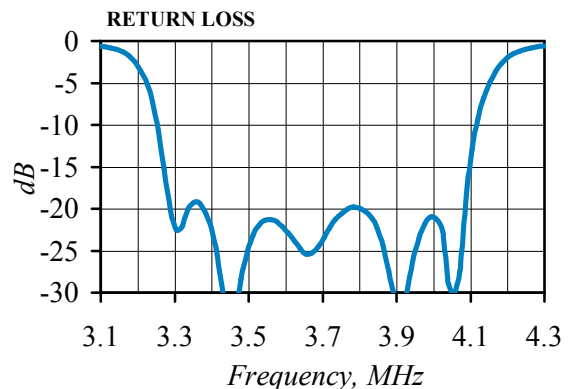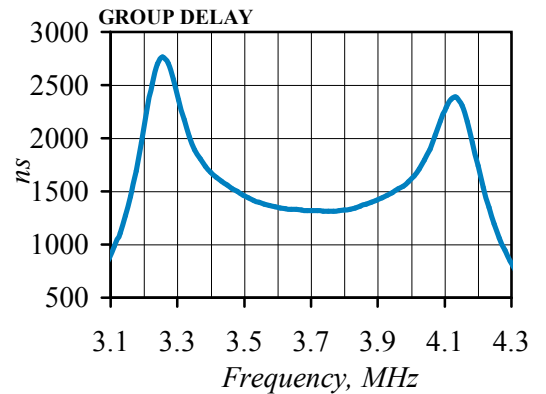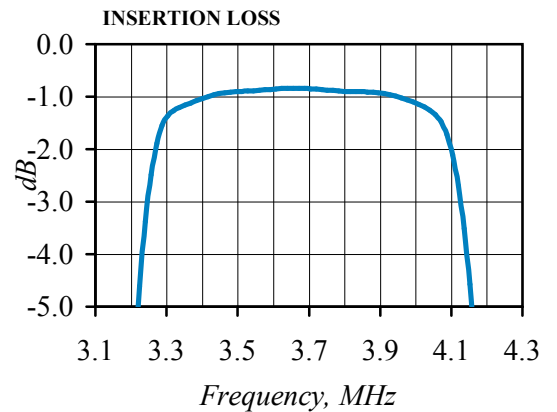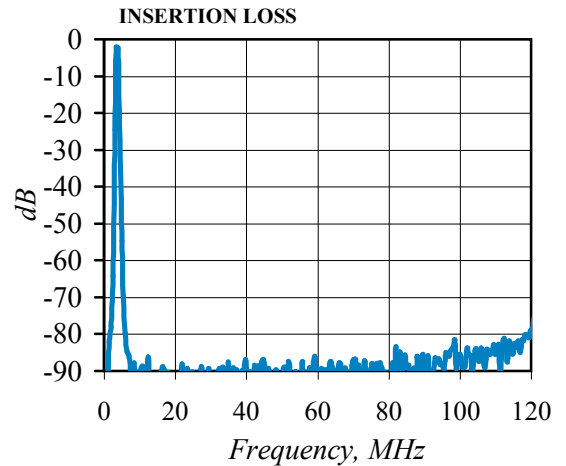

Specifications Subject To Change Without Notice