

FEATURES :

- *High Power*
- *Low Loss*
- *Wide Stopband*

SPECIFICATIONS

Center Frequency, [MHz]	333
Insertion Loss@CF [dB] max.	0.45
1dB Bandwidth, [MHz] min.	230
20dB Bandwidth, [MHz] max.	315
Reject Bands, [MHz]	DC to 140 and 550 to 1500
Reject Attenuation, [dB] min.	40
VSWR	1.5 : 1
Average Power, [Watts]	150


Operating Characteristics

Operating Temperature	-40°C to +85°C
Impedance, [Ohm]	50





Ordering Information

Model No.	Connectors
FBL5-333-215-150W	N

Outline drawing

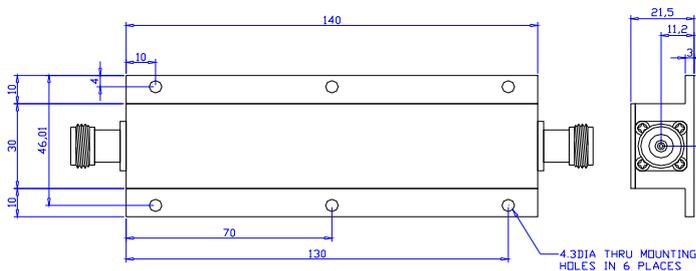

Dimensions in mm

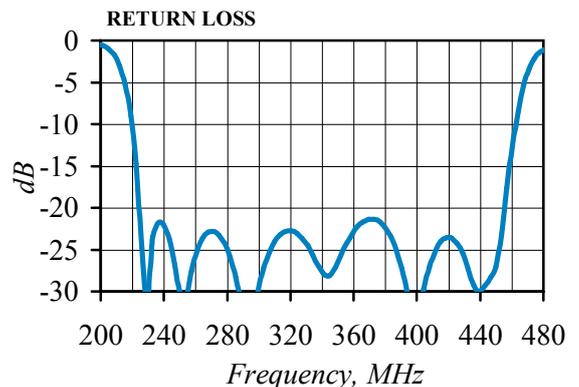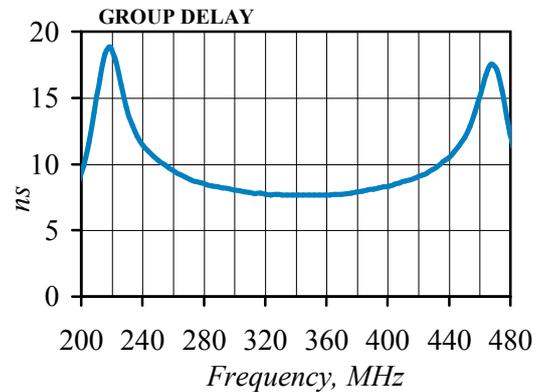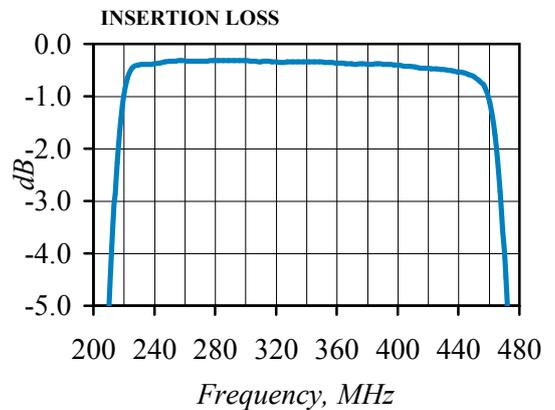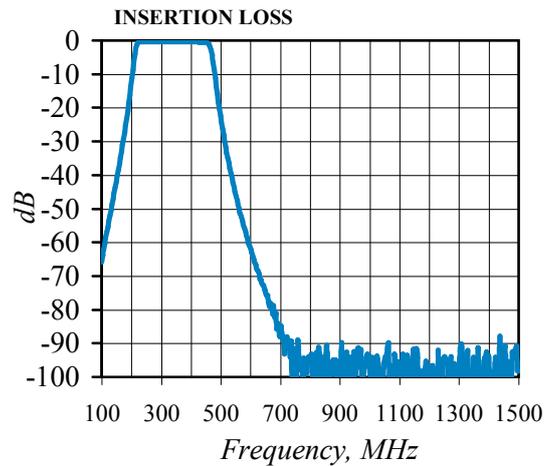

Specifications Subject To Change Without Notice