

FEATURES :

- **High Power**
- **Narrow Bandwidth**
- **Wide Stopband**


SPECIFICATIONS

Center Frequency, [MHz]	43
Insertion Loss@CF [dB] max.	1.3
1dB Bandwidth, [MHz] min.	6
20dB Bandwidth, [MHz] max.	11
Reject Bands, [MHz]	DC to 30 and 60 to 1000
Reject Attenuation, [dB] min.	60
VSWR	1.5 : 1
Average Power, [Watts]	30
Operating Characteristics	
Operating Temperature	-40°C to +85°C
Impedance, [Ohm]	50





Ordering Information

Model No.	Connectors
FBL5-43-6	N

Outline drawing

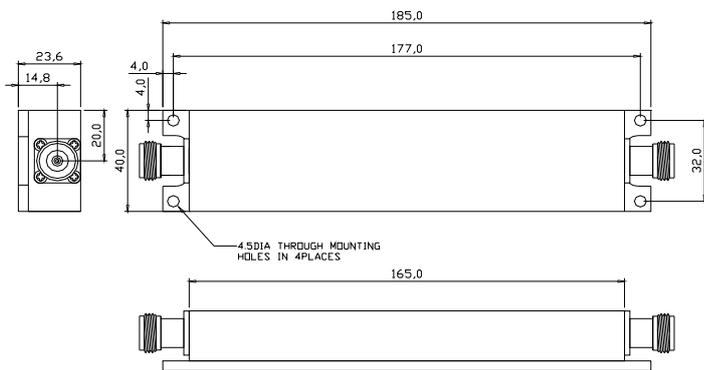

Dimensions in mm

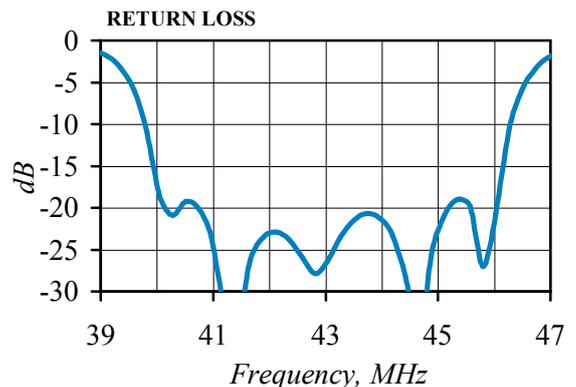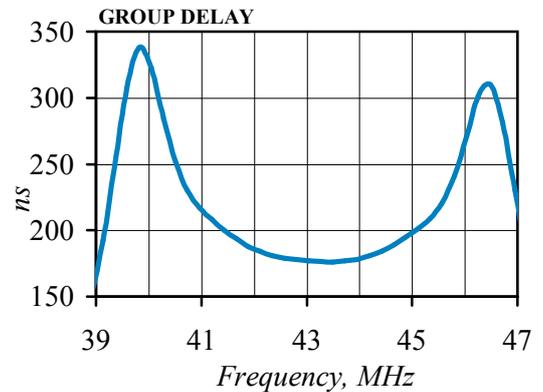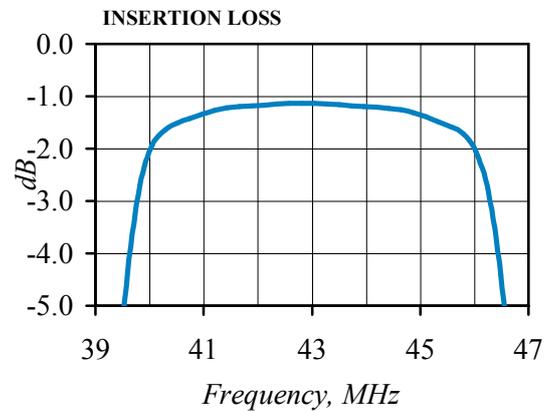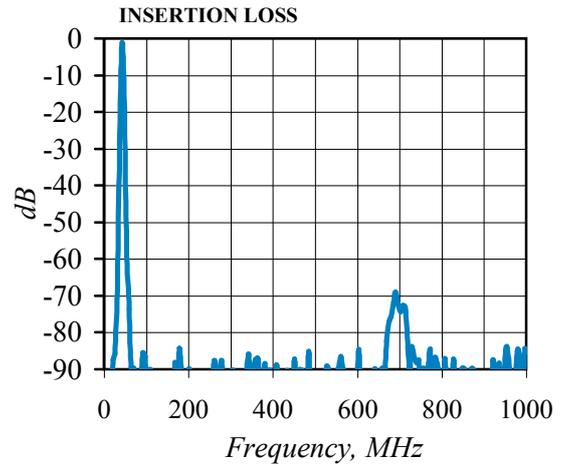

Specifications Subject To Change Without Notice