

FEATURES :

- *High Power*
- *Low Loss*


SPECIFICATIONS

Center Frequency, [MHz]	8.25
Insertion Loss@CF [dB] max.	1.3
1dB Bandwidth, [MHz] min.	0.9
20dB Bandwidth, [MHz] max.	1.7
	DC to 6.4 and
Reject Bands, [MHz]	10.4 to 190
Reject Attenuation, [dB] min.	60
VSWR	1.5 : 1
Average Power, [Watts]	100
Operating Characteristics	
Operating Temperature	-40°C to +85°C
Impedance, [Ohm]	50





Ordering Information

Model No.	Connectors
FBL5-8.25-0.5	N

Outline drawing

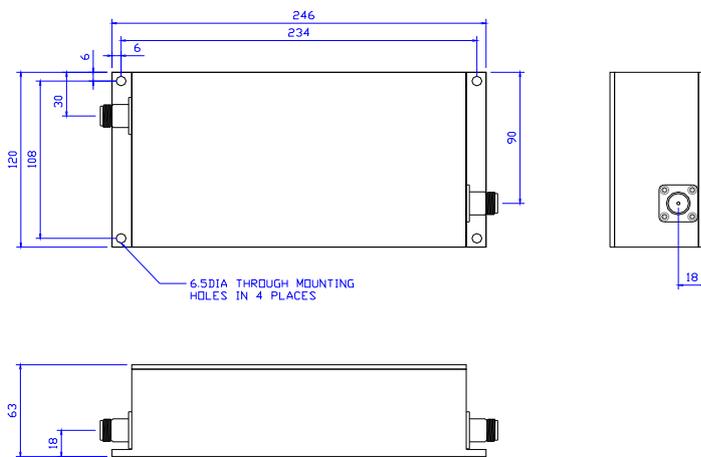

Dimensions in mm

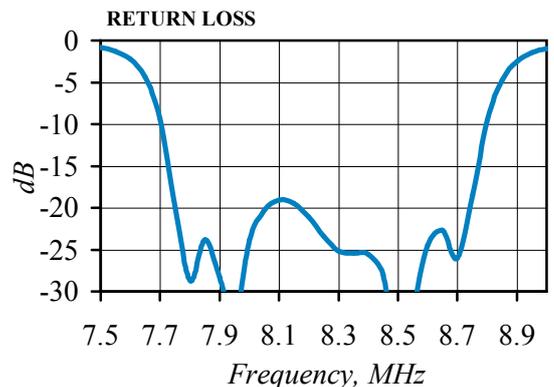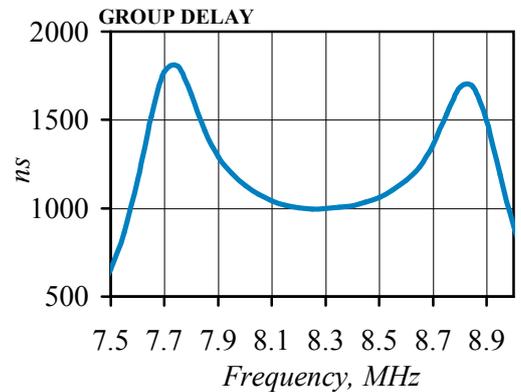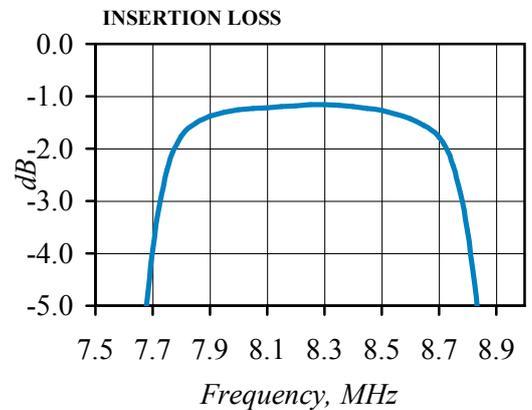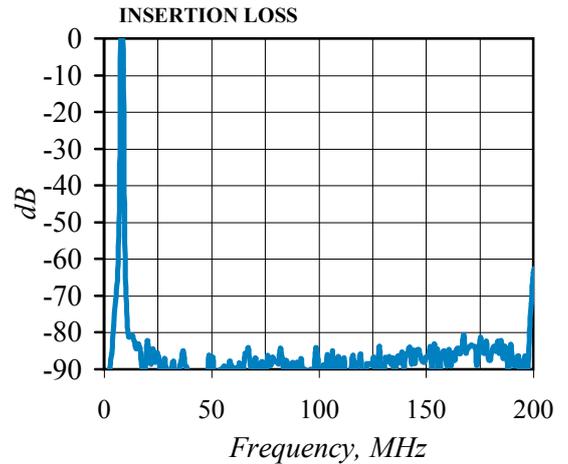

Specifications Subject To Change Without Notice