

FEATURES :

- *Small Size*
- *Low Loss*
- *Wide Stopband*

SPECIFICATIONS

Center Frequency, [MHz]	350
Insertion Loss@CF [dB] max.	0.5
1dB Bandwidth, [MHz] min.	120
20dB Bandwidth, [MHz] max.	200
Reject Bands, [MHz]	DC to 150 and 550 to 6000
Reject Attenuation, [dB] min.	60
VSWR	1.5 : 1
Average Power, [Watts]	5


Operating Characteristics

Operating Temperature	-40°C to +85°C
Impedance, [Ohm]	50

Ordering Information

Model No.	Connectors
FBL6-350-120-SMA	SMA
FBL6-350-120-N	N

Outline drawing

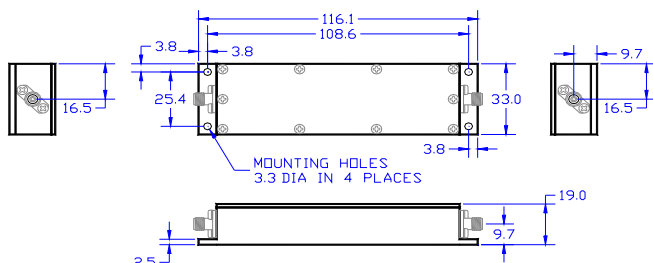

Dimensions in mm

