

FEATURES :

- **High Power**
- **Low Loss**


SPECIFICATIONS

Center Frequency, [MHz]	10
Insertion Loss@CF [dB] max.	0.8
1dB Bandwidth, [MHz] min.	4
20dB Bandwidth, [MHz] max.	5.7
Reject Bands, [MHz]	DC to 5.0 and 15.0 to 250
Reject Attenuation, [dB] min.	60
VSWR	1.5 : 1
Average Power, [Watts]	100
Operating Characteristics	
Operating Temperature	-40°C to +85°C
Impedance, [Ohm]	50





Ordering Information

Model No.	Connectors
FBL7-10-4-100W	N

Outline drawing

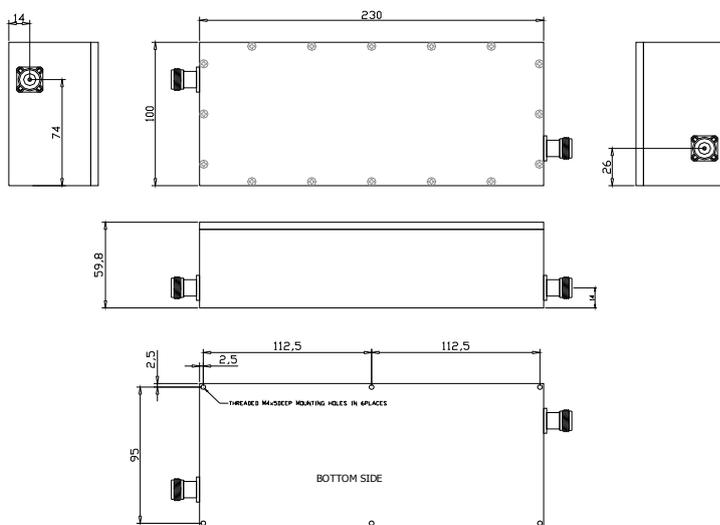

Dimensions in mm

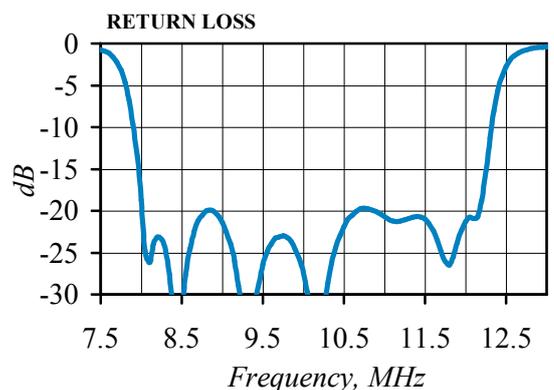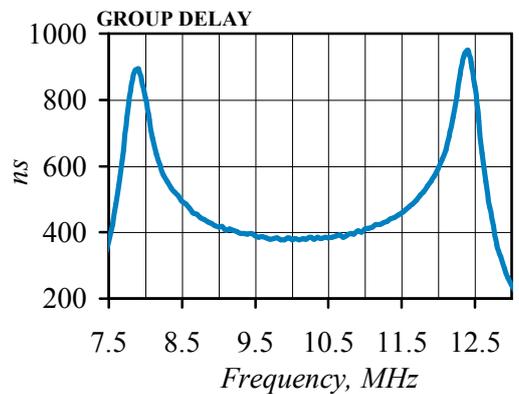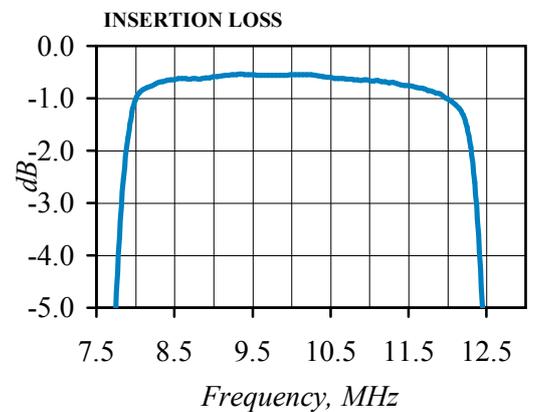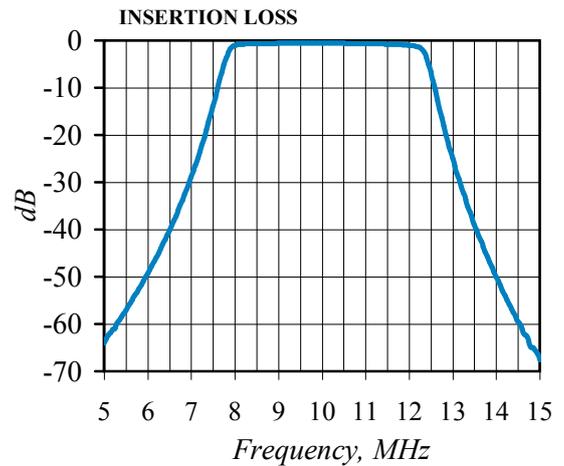

Specifications Subject To Change Without Notice