

**FEATURES :**

- **High Power**
- **Low Loss**
- **Wide Stopband**

**SPECIFICATIONS**

Center Frequency, [MHz]	155
Insertion Loss@CF [dB] max.	1.2
1dB Bandwidth, [MHz] min.	38
20dB Bandwidth, [MHz] max.	60
Reject Bands, [MHz]	DC to 100 and 200 to 1500
Reject Attenuation, [dB] min.	60
VSWR	1.5 : 1
Average Power, [Watts]	50


**Operating Characteristics**

Operating Temperature	-40°C to +85°C
Impedance, [Ohm]	50

**Ordering Information**

Model No.	Connectors
FBL7-155-38	N

**Outline drawing**

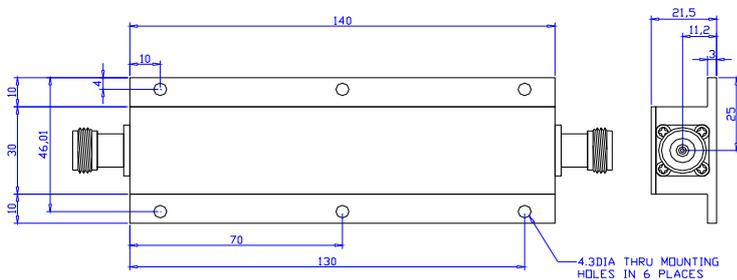

Dimensions in mm

