

FEATURES :

- *Small Size*
- *Low Loss*

SPECIFICATIONS

Center Frequency, [MHz]	230
Insertion Loss@CF [dB] max.	1.2
1dB Bandwidth, [MHz] min.	60
20dB Bandwidth, [MHz] max.	85
	DC to 160 and
Reject Bands, [MHz]	300 to 1400
Reject Attenuation, [dB] min.	60
VSWR	1.5 : 1
Average Power, [Watts]	1


Operating Characteristics

Operating Temperature	-40°C to +85°C
Impedance, [Ohm]	50





Ordering Information

Model No.	Connectors
FBL7-230-60-SMA	SMA
FBL7-230-60-N	N

Outline drawing

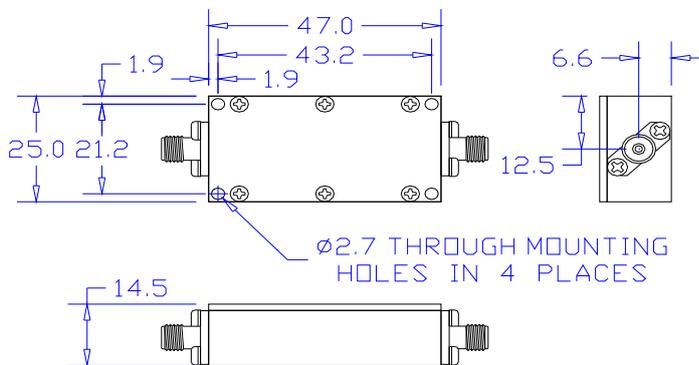

Dimensions in mm

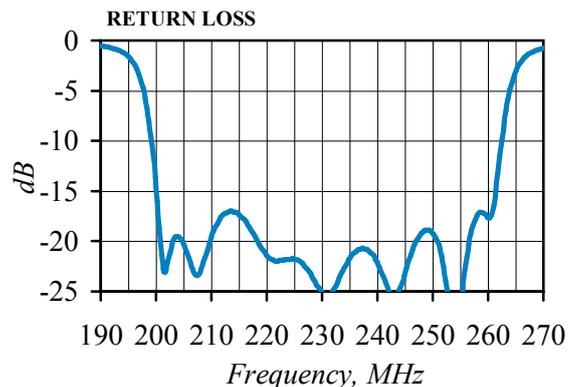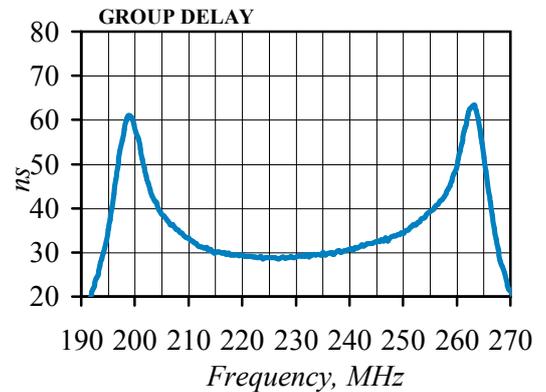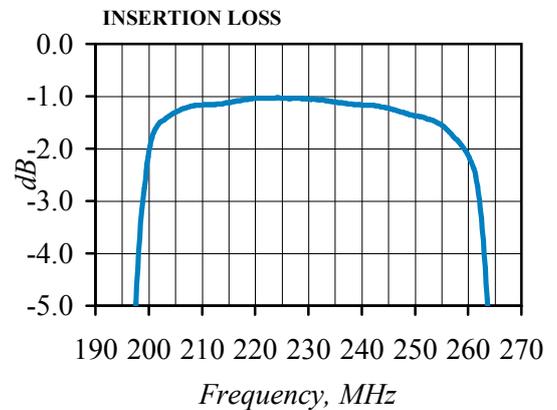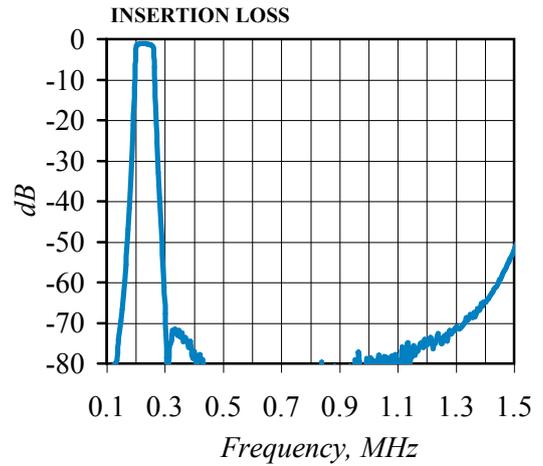

Specifications Subject To Change Without Notice