

FEATURES :

- *High Power*
- *Low Loss*
- *Wide Stopband*


SPECIFICATIONS

Center Frequency, [MHz]	41
Insertion Loss@CF [dB] max.	0.9
1dB Bandwidth, [MHz] min.	18
20dB Bandwidth, [MHz] max.	25
Reject Bands, [MHz]	DC to 22 and 62 to 2500
Reject Attenuation, [dB] min.	60
VSWR	1.5 : 1
Average Power, [Watts]	50
Operating Characteristics	
Operating Temperature	-40°C to +85°C
Impedance, [Ohm]	50





Ordering Information

Model No.	Connectors
FBL7-41-18	N

Outline drawing

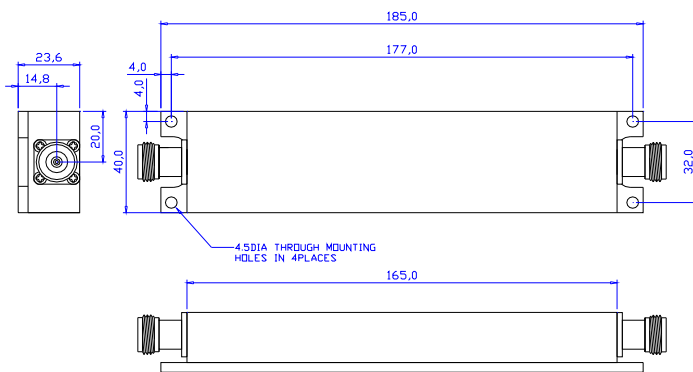

Dimensions in mm

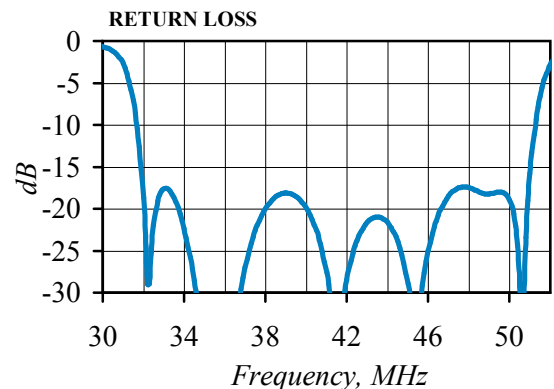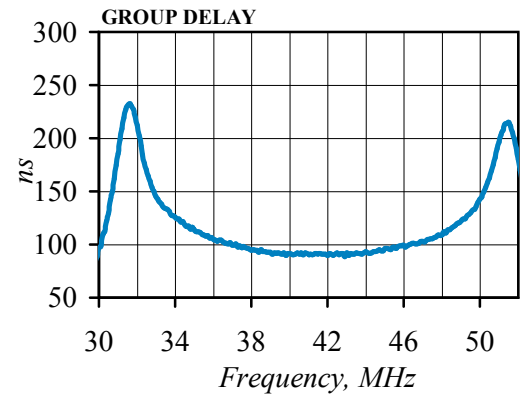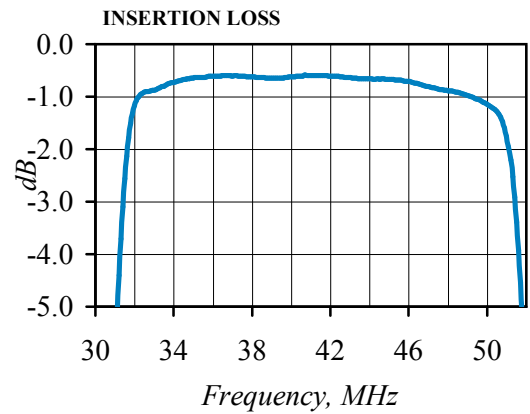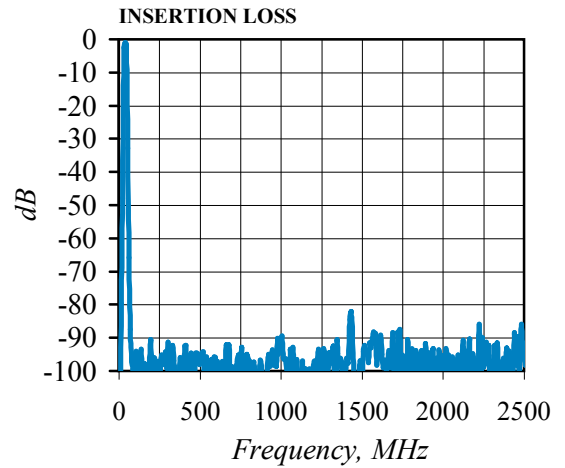

Specifications Subject To Change Without Notice