

FEATURES :

- **High Power**
- **Low Loss**


SPECIFICATIONS

Center Frequency, [MHz]	5
Insertion Loss@CF [dB] max.	0.8
1dB Bandwidth, [MHz] min.	2
20dB Bandwidth, [MHz] max.	3
Reject Bands, [MHz]	DC to 2.5 and 7.5 to 150
Reject Attenuation, [dB] min.	60
VSWR	1.5 : 1
Average Power, [Watts]	400
Operating Characteristics	
Operating Temperature	-40°C to +85°C
Impedance, [Ohm]	50

Ordering Information

Model No.	Connectors
FBL7-5-2-400W	N

Outline drawing

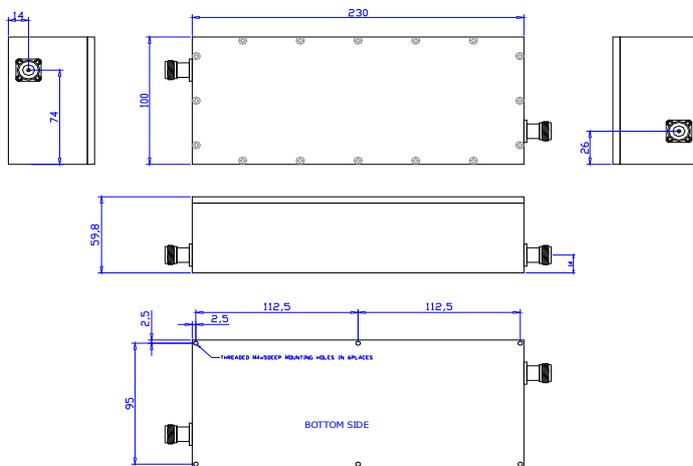

Dimensions in mm

