

FEATURES :

- *Small Size*
- *Narrow Bandwidth*
- *Wide Stopband*

SPECIFICATIONS

Center Frequency, [MHz]	460
Insertion Loss@CF [dB] max.	4.0
3dB Bandwidth, [MHz] min.	20
20dB Bandwidth, [MHz] max.	30
Reject Bands, [MHz]	DC to 430 and 490 to 3000
Reject Attenuation, [dB] min.	80
VSWR	1.5 : 1
Average Power, [Watts]	1


Operating Characteristics

Operating Temperature	-40°C to +85°C
Impedance, [Ohm]	50

Ordering Information

Model No.	Connectors
FBL8-460-20-SMA	SMA
FBL8-460-20-N	N

Outline drawing

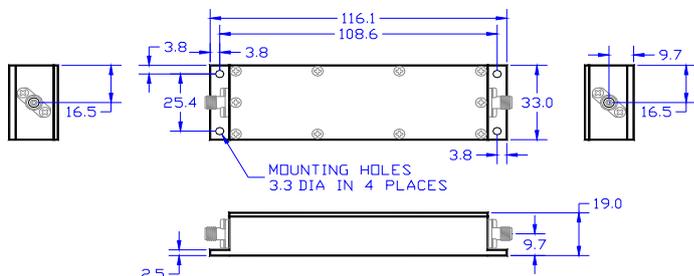

Dimensions in mm

