

FEATURES :

- **Small Size**
- **Steep Rejection**
- **Low Loss**


SPECIFICATIONS

Center Frequency, [GHz]	2.4
Insertion Loss@Center Freq. [dB]	0.7
3dB Bandwidth, [MHz] min.	400
20dB Bandwidth, [MHz] max.	455
Reject Bands, [GHz]	DC to 2.1 and 2.7 to 12
Reject Attenuation, [dB] min.	60
VSWR	1.5 : 1
Average Power, [Watts]	25
Operating Characteristics	
Operating Temperature	-40°C to+85°C
Impedance, [Ohm]	50

Ordering Information

Model No.	Connectors
FCL11-2400-400	SMA

Outline drawing

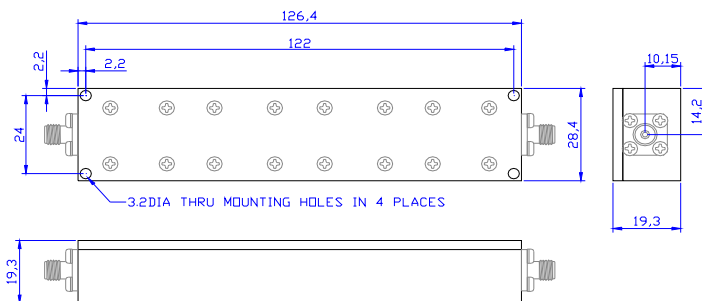

Dimensions in mm

Specifications Subject To Change Without Notice

Typical Performance

