

**FEATURES :**

- **Small Size**
- **Wide Passband**
- **Low Loss**


**SPECIFICATIONS**

Center Frequency, [GHz]	8.9
Insertion Loss@Center Freq. [dB]	1.0
1dB Bandwidth, [MHz] min.	780
30dB Bandwidth, [MHz] max.	1000
Reject Bands, [GHz]	DC to 8.25 and 9.5 to 20
Reject Attenuation, [dB] min.	60
VSWR	1.5 : 1
Average Power, [Watts]	5
<b>Operating Characteristics</b>	
Operating Temperature	-40°C to +85°C
Impedance, [Ohm]	50

**Ordering Information**





Model No.	Connectors
FCL11-8900-800	SMA

**Outline drawing**

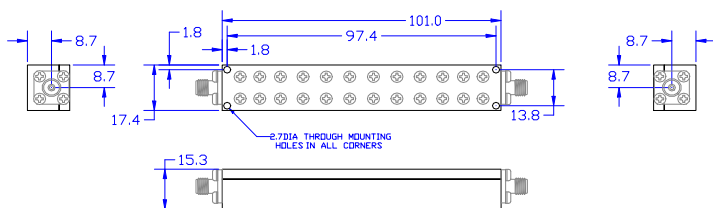

Dimensions in mm

**Typical Performance**

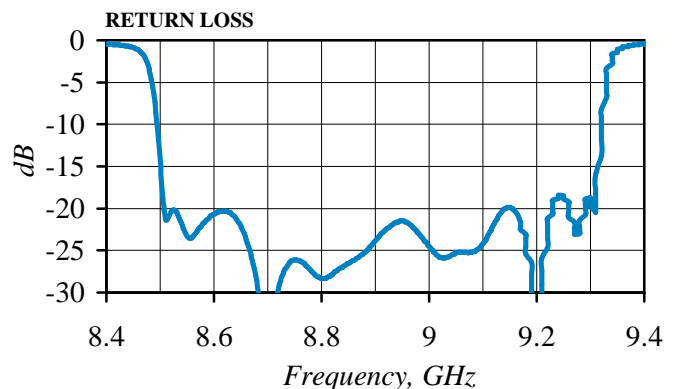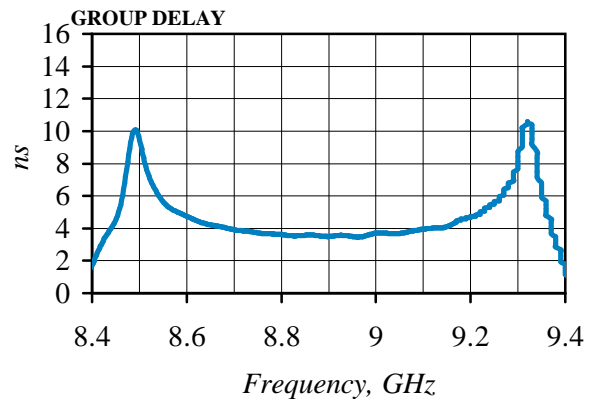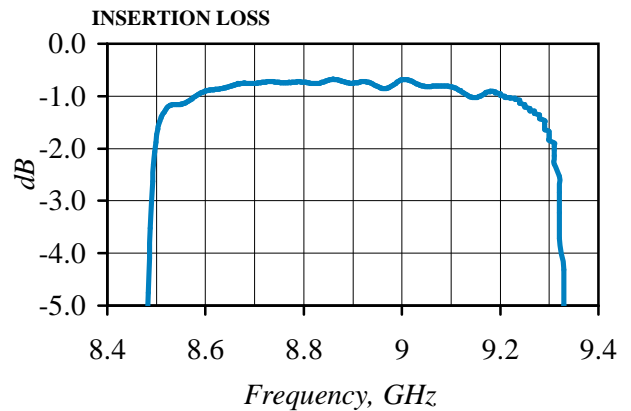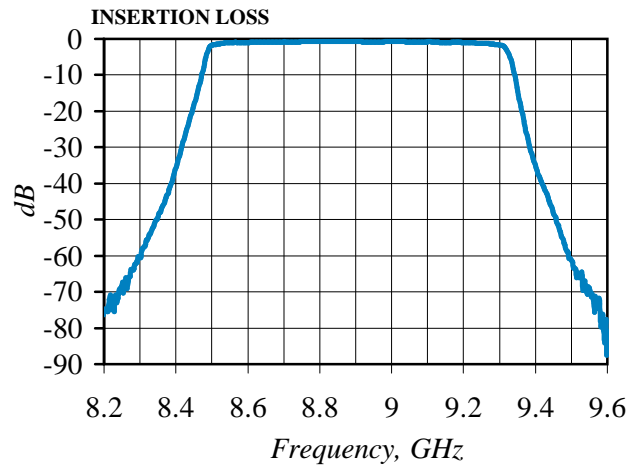

Specifications Subject To Change Without Notice