

FEATURES :

- **Small Size**
- **Wide Passband**
- **Low Loss**


SPECIFICATIONS

Center Frequency, [GHz]	9.7
Insertion Loss@Center Freq. [dB]	1.0
1dB Bandwidth, [MHz] min.	790
30dB Bandwidth, [MHz] max.	1000
Reject Bands, [GHz]	DC to 9.05 and 10.35 to 22
Reject Attenuation, [dB] min.	60
VSWR	1.5 : 1
Average Power, [Watts]	5
Operating Characteristics	
Operating Temperature	-40°C to+85°C
Impedance, [Ohm]	50

Ordering Information





Model No.	Connectors
FCL11-9700-800	SMA

Outline drawing

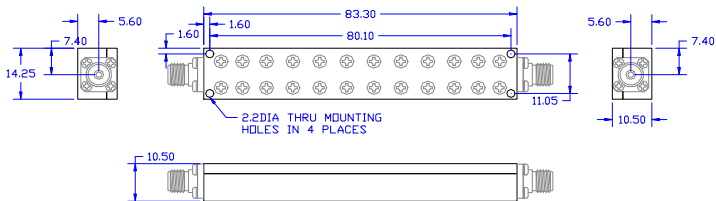

Dimensions in mm

Typical Performance

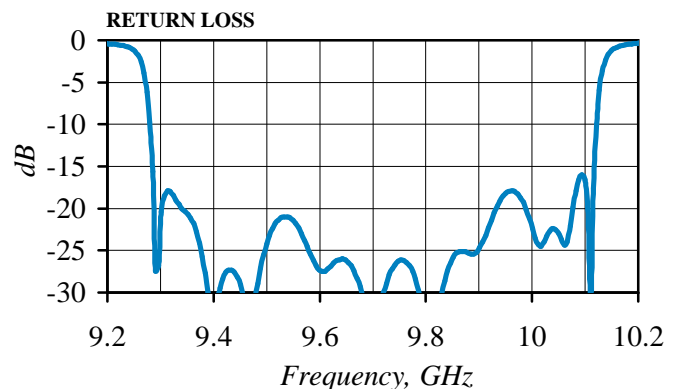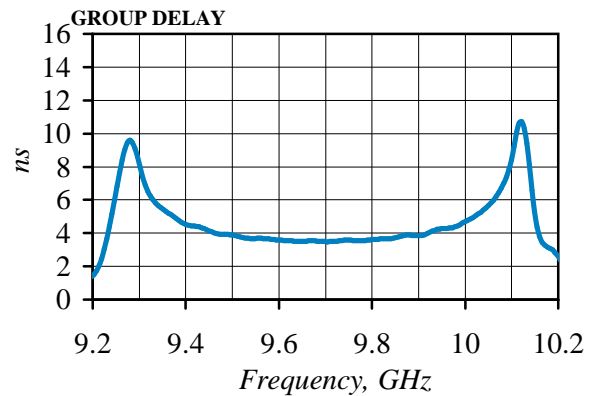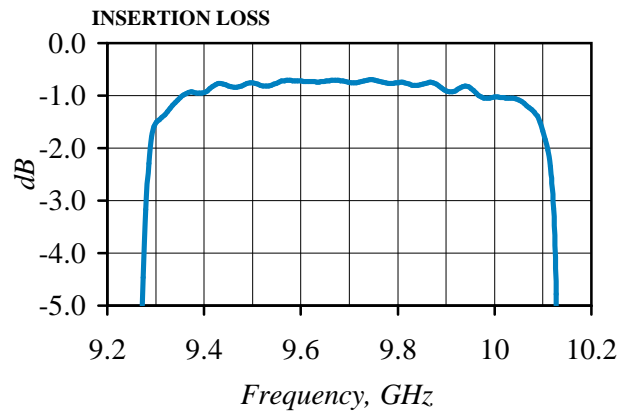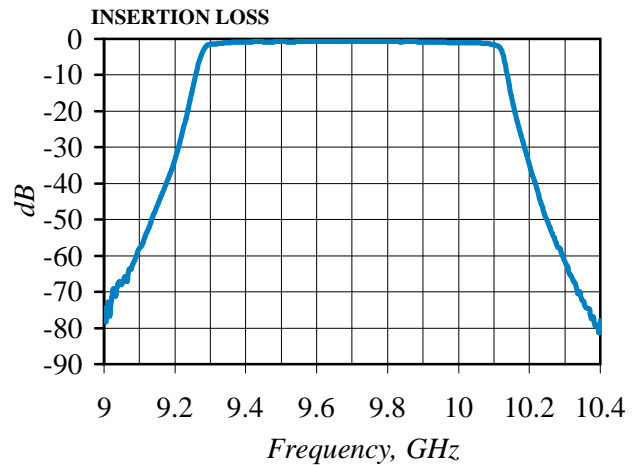

Specifications Subject To Change Without Notice