

FEATURES :

- Small Size
- Steep Rejection
- Low Loss

SPECIFICATIONS

Center Frequency, [GHz]	5.5
Insertion Loss@Center Freq. [dB]	1.0
3dB Bandwidth, [MHz] min.	720
20dB Bandwidth, [MHz] max.	780
Reject Bands, [GHz]	DC to 4.95 and 5.99 to 19GHz
Reject Attenuation, [dB] min.	60
VSWR	1.5 : 1
Average Power, [Watts]	10


Operating Characteristics

Operating Temperature	-40°C to+85°C
Impedance, [Ohm]	50

Ordering Information





Model No.	Connectors
FCL12-5500-700	SMA

Outline drawing

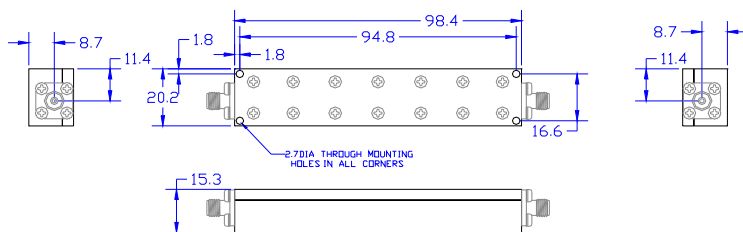

Dimensions in mm

Typical Performance

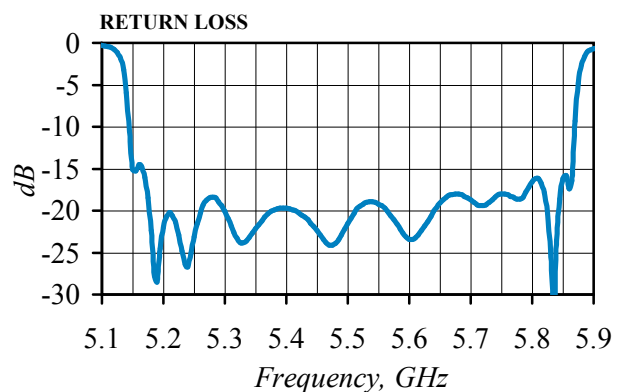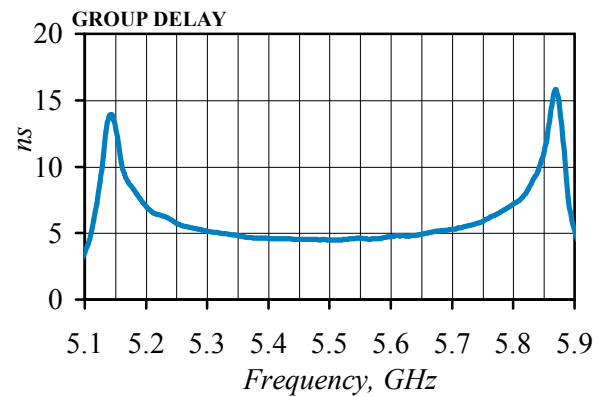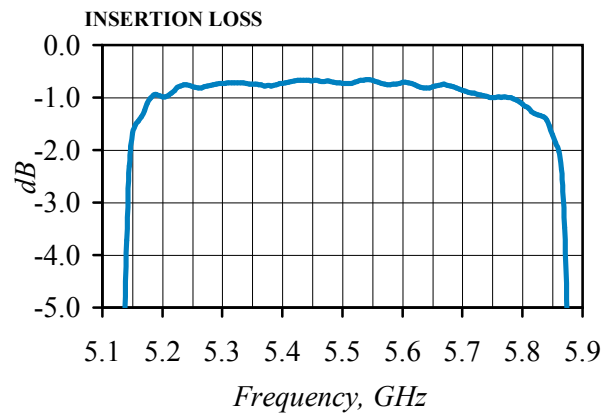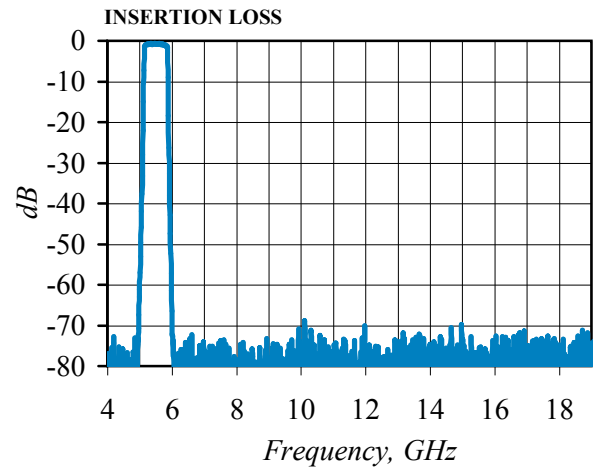

Specifications Subject To Change Without Notice