

FEATURES :

- **Small Size**
- **Wide Stopband**
- **Low Loss**


SPECIFICATIONS

Center Frequency, [MHz]	3150
Insertion Loss@Center Freq. [dB]	1
1dB Bandwidth, [MHz] min.	500
30dB Bandwidth, [MHz] max.	600
Reject Bands, [GHz]	DC to 2.75
Reject Attenuation, [dB] min.	3.5 to 19
VSWR	60
Average Power, [Watts]	1.5 : 1
	25
Operating Characteristics	
Operating Temperature	-40°C to+85°C
Impedance, [Ohm]	50

Ordering Information





Model No.	Connectors
FCL14-3150-500-SMA	SMA

Outline drawing

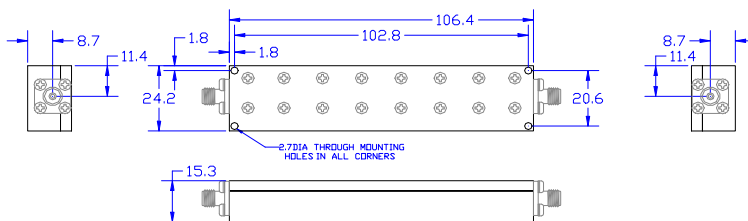

Dimensions in mm

Typical Performance

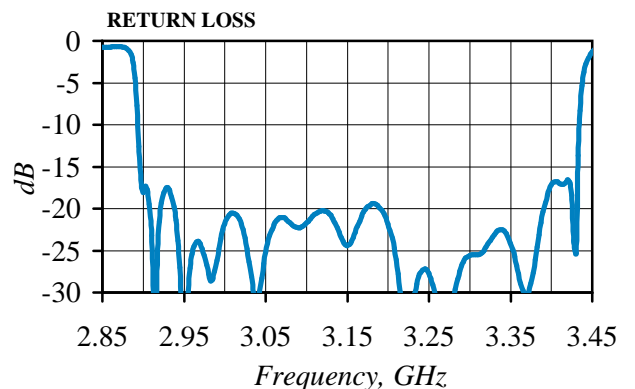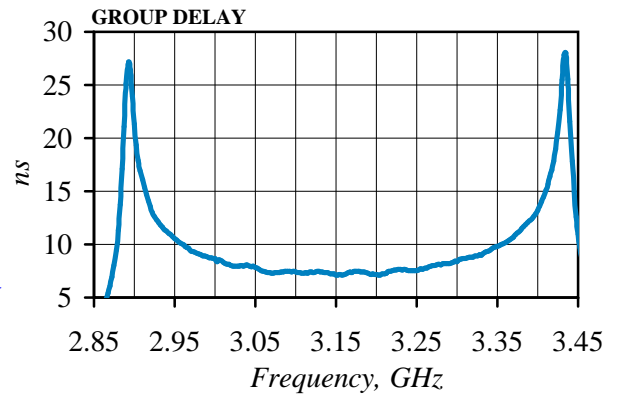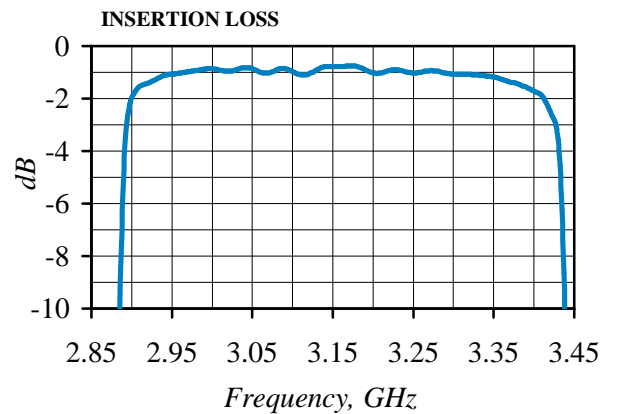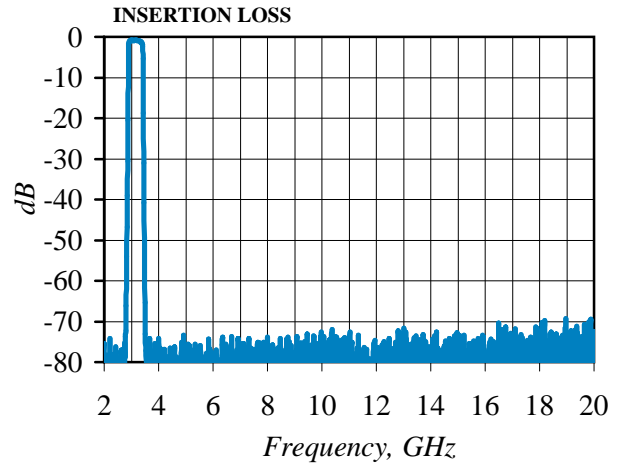

Specifications Subject To Change Without Notice