

**FEATURES :**

- **Small Size**
- **Steep Rejection**
- **Low Loss**


**SPECIFICATIONS**

Center Frequency, [GHz]	10.5
Insertion Loss@Center Freq. [dB]	1.5
3dB Bandwidth, [GHz] min.	3.0
30dB Bandwidth, [GHz] max.	4.5
Reject Bands, [GHz]	DC to 8.6
Reject Attenuation, [dB] min.	12.4 to 22
VSWR	60
Average Power, [Watts]	1.7 : 1
	5
<b>Operating Characteristics</b>	
Operating Temperature	-40°C to+85°C
Impedance, [Ohm]	50

**Ordering Information**

Model No.	Connectors
FCL17-10500-3000-SMA	SMA

**Outline drawing**

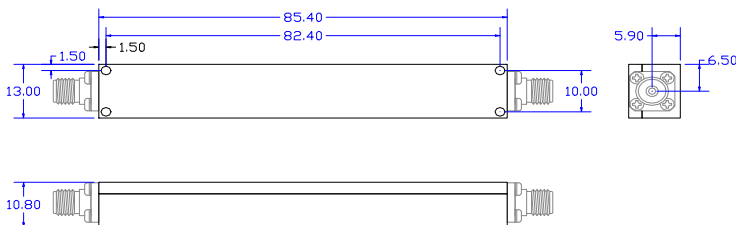

Dimensions in mm

Specifications Subject To Change Without Notice

**Typical Performance**

