

FEATURES :

- **Small Size**
- **Narrow Passband**
- **Low Loss**


SPECIFICATIONS

| | |
|----------------------------------|---------------|
| Center Frequency, [MHz] | 2856 |
| Insertion Loss@Center Freq. [dB] | 1.2 |
| 1dB Bandwidth, [MHz] min. | 30.0 |
| 30dB Bandwidth, [MHz] max. | 130 |
| Reject Bands, [GHz] | DC to 2.756 |
| Reject Attenuation, [dB] min. | 40 |
| VSWR | 1.3 : 1 |
| Average Power, [Watts] | 10 |
| Operating Characteristics | |
| Operating Temperature | -40°C to+85°C |
| Impedance, [Ohm] | 50 |

Ordering Information

| Model No. | Connectors |
|------------------|------------|
| FCL3-2856-30-SMA | SMA |

Outline drawing

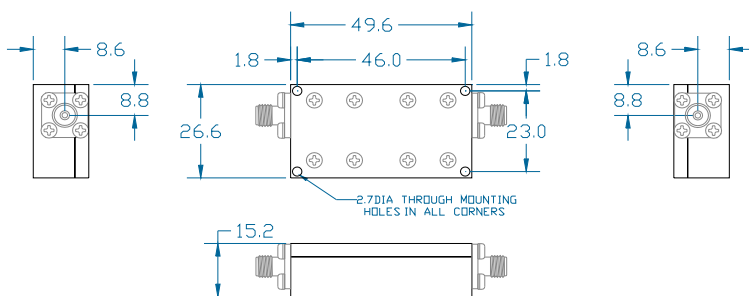

Dimensions in mm

Specifications Subject To Change Without Notice

Typical Performance

