

**FEATURES :**

- **Small Size**
- **Narrow Passband**
- **Low Loss**

**SPECIFICATIONS**

Center Frequency, [GHz]	3
Insertion Loss in passband, [dB] max.	1.3
Passband, [MHz], min	20.0
Reject Bands, [GHz]	DC to 2.965 & 3.035 to 9
Reject Attenuation, [dB] min.	20
VSWR	1.5 : 1
Average Power, [Watts]	10


**Operating Characteristics**

Operating Temperature	-40°C to +85°C
Impedance, [Ohm]	50

**Ordering Information**

Model No.	Connectors
FCL3-3000-20U	SMA

**Outline drawing**

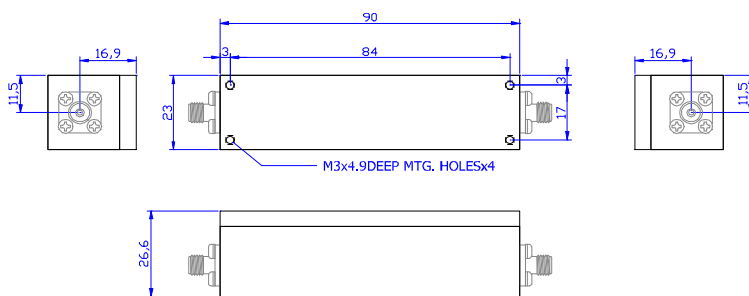

Dimensions in mm

Specifications Subject To Change Without Notice

**Typical Performance**

